

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representation of  
The original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**BEST AVAILABLE COPY**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number  
**WO 02/070049 A1**

(51) International Patent Classification<sup>7</sup>: A61M 5/145,  
5/315

TROCKI, Mark; 130 Reaghard Drive, Cheswick, PA  
15024 (US).

(21) International Application Number: PCT/US02/03210

(74) Agent: BRADLEY, Gregory, L.; Medrad, Inc., One  
Medrad Drive, Indianola, PA 15051 (US).

(22) International Filing Date: 4 February 2002 (04.02.2002)

(81) Designated States (*national*): CN, JP.

(25) Filing Language: English

(84) Designated States (*regional*): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE, TR).

(26) Publication Language: English

(30) Priority Data:

60/267,303 8 February 2001 (08.02.2001) US  
60/317,605 6 September 2001 (06.09.2001) US


Published:

— with international search report  
— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

(71) Applicant: MEDRAD, INC. [US/US]; One Medrad  
Drive, Indiana, PA 15051 (US).

(72) Inventors: REILLY, David, M.; 2318 Middle Road,  
Glenshaw, PA 15116 (US). TROMBLEY, Frederick,  
W., III; 5750 Phillips Road, Gibsonia, PA 15044 (US).  
For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: SYRINGE LOADING DEVICES FOR USE WITH SYRINGES AND MEDICAL INJECTORS

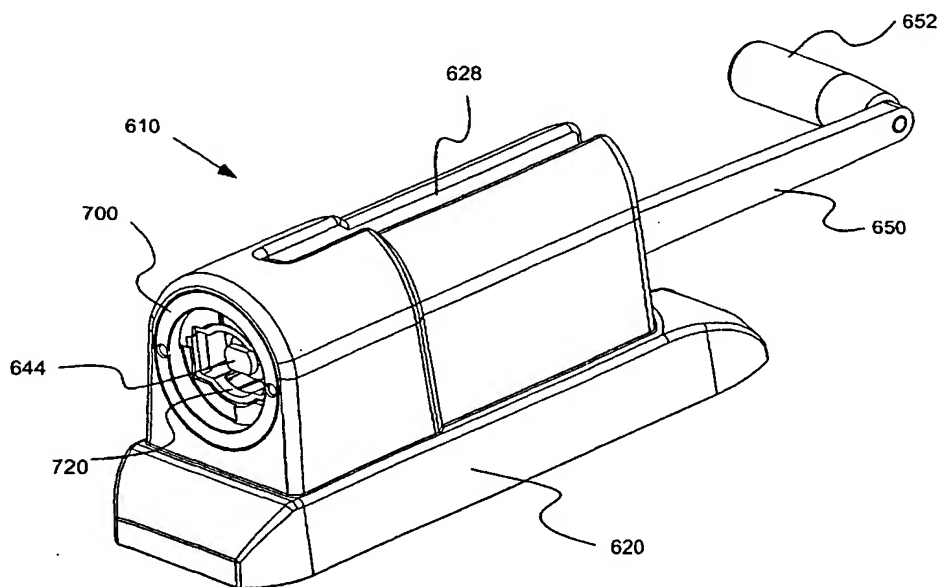

(57) Abstract: A syringe loading/filling device (5) (or "syringe Loader") includes a syringe mounting mechanism (22a, 22b) adapted to cooperate with an attachment mechanism of a syringe (20) to attach the syringe to the syringe loader and a drive member adapted to impart motion to the syringe plunger (40). The syringes for use with the syringe loader include a syringe plunger (40) slidably disposed therein and an attachment mechanism (66a, 66b) for attachment of the syringe (20) to an injector (10). Such injectors include a mounting mechanism adapted to cooperate with the attachment mechanism on the syringe to mount the syringe (20) on the injector.

WO 02/070049 A1

**THIS PAGE BLANK (USPTO)**

## SYRINGE LOADING DEVICES FOR USE WITH SYRINGES AND MEDICAL INJECTORS

### BACKGROUND OF THE INVENTION

5

The present invention relates to syringes and syringe loading devices and, more particularly, to syringes, syringe loading devices and medical injectors and to medical injector systems including such syringes and syringe loading devices.

10 A number of injector-actuated syringes and powered injectors for use in medical procedures such as angiography, computed tomography, ultrasound and magnetic resonance imaging (MRI) have been developed. U.S. Patent No. 4,006,736, for example, discloses an injector and syringe for injecting fluid into the vascular system of a human being or an animal. Typically, such injectors comprise drive members such as pistons that connect to a syringe plunger. For example, U.S. Patent No. 4,677,980, the disclosure of which is incorporated herein  
15 by reference, discloses an angiographic injector and syringe wherein the drive member of the injector can be connected to, or disconnected from, the syringe plunger at any point along the travel path of the plunger via a releasable mechanism. A front-loading syringe and injector system is also disclosed in U.S. Patent No. 5,383,858, the disclosure of which is incorporated herein by reference.

20 The front-loading injector of U.S. Patent No. 5,383,858 includes a releasable mounting mechanism for securing the syringe to the front wall of the injector. Other types of releasable mounting mechanisms for front-loading syringes are disclosed in U.S. Patent Application Publication No. 2001-0047153, assigned to the assignee of the present invention, the disclosure of which is incorporated herein by reference

25 The use of specifically designed mounting mechanisms generally limits the use of syringes of other various types with front-loading injectors. Syringe adapters attachable to those front-loading injectors are sometimes used to allow the use of such syringes with the front-loading injectors. For example, U.S. Patent No. 5,520,653 discloses several adapters designed to allow the use of various syringes with a front-loading injector. Other adapters for  
30 front-loading injectors are disclosed, for example, in PCT Publication No. WO 01/08727 and U.S. Patent Application Serial No. 09/633,299, filed on August 8, 2000, each assigned to the

assignee of the present invention, the disclosures of which are incorporated herein by reference.

Syringes are typically purchased either in a "prefilled" state, containing injection fluid supplied by the manufacturer, or in an empty, "fillable" state. Under current practice, empty  
5 syringes are typically attached to or loaded onto the power injector (either directly or via an adapter as known in the art) and connected to a source of injection fluid via, for example, tubing. The drive member of the powered injector is then reversed to draw the syringe plunger rearward within the syringe, thereby drawing injection fluid into the syringe for later  
10 injection into a patient. In many medical applications, however, powered injectors are used in procedures and areas in which there are substantial time and access constraints. For example, such time and access constraints often occur in MRI. In an MR suite, space is inherently limited. Injector access is limited as a result of such space limitation and lengthy scan times for patients. In time and/or access constrained procedures, loading of injection fluid into empty syringes using a powered injector results in inefficient use of personnel,  
15 equipment, time and/or space.

It is, therefore, very desirable to develop improved syringe loading/filling devices, and systems and methods to improve the efficiency of use of personnel, equipment, time and/or space.

## 20 SUMMARY OF THE INVENTION

In one aspect, the present invention provides a syringe loading device (or "syringe loader") for loading an injection fluid into a syringe. The syringes for use with the syringe loader include a syringe plunger slidably disposed therein and an attachment mechanism for  
25 attachment of the syringe to an injector. The injector includes a mounting mechanism adapted to cooperate with the attachment mechanism on the syringe to mount the syringe on the injector. The syringe loader includes generally a syringe mounting mechanism adapted to cooperate with the attachment mechanism of the syringe to attach the syringe to the syringe loader and a drive member adapted to impart motion to the syringe plunger.

30 In one embodiment, the drive member includes a flange on a rearward end thereof that is manually operated by a user during loading. In another embodiment, the drive member is linked to a lever arm, which is rotatable to impart reciprocal linear motion to the syringe

plunger. An axis of rotation about which the lever arm rotates can be fixed or movable (for example, to adjust the stroke thereof). In a further embodiment, the drive member is powered (for example, via connection with or integration with a powered screw drive). Virtually any type of power source (for example, electric, hydraulic, pneumatic, etc.) can be used.

5 In still a further embodiment, the drive member includes one or more ratchet teeth. The syringe loader in this embodiment includes a rotating handle that is rotatable about an axis. The rotating handle has attached thereto on a first side of the axis a first pawl and on a second side of the axis a second pawl. The syringe loader also includes a mechanism to bring only one of the first pawl and the second pawl into cooperation with the ratchet teeth of the  
10 drive member at a given time. Rotation of the handle in a first direction causes forward movement of the drive member when the first pawl is brought into cooperation with the ratchet teeth. Rotation of the handle in the first direction causes rearward movement of the drive member with the second pawl is brought into cooperation with the ratchet teeth. The rotating handle is preferably biased in a second, "open" direction, opposite of the first  
15 direction.

In another aspect, the present invention provides a syringe loader for loading an injection fluid into a syringe including a syringe tip from which pressurized injection fluid exits the syringe during an injection procedure. The syringe loader includes a connector to connect a source of injection fluid to the syringe tip. The connector includes a first  
20 connection mechanism to connect to the syringe tip and a second connection mechanism to connect to the source of injection fluid. The connector further includes a valve to open and close the fluid connection between the source of injection fluid and the syringe tip. The connector also includes an inlet between the valve and the second connection mechanism that is adapted to pass a pressurized gas into the source of injection medium when the valve is  
25 closed. The valve is preferably openable after pressurized gas is passed into the source of injection fluid so that injection fluid is forced into the syringe via the syringe tip by the pressurized gas within the source of contrast fluid. In one embodiment, the syringe loader includes an air pump in fluid connection with the inlet to pass pressurized air into the source of injection fluid. The air pump can, for example, include a ball pump in fluid connection  
30 with a bladder.

In another aspect, the present invention provides a system including a syringe, an injector (preferably a powered injector) to pressurize an injection fluid loaded into the

syringe, and a syringe loader to load the injection fluid into the syringe. The syringe loader is preferably operable independent of the injector. However, in an alternate embodiment, the operation of the syringe loader and the injector can be coordinated and/or interdependent, by means, for example, of a common control unit.

5 In a further aspect, the present invention provides a syringe loader for loading an injection fluid into a syringe independent of an injector. The syringe includes a syringe plunger slidably disposed therein and an attachment mechanism for attachment of the syringe to the injector, as described above. Likewise, the injector includes a mounting mechanism to cooperate with the attachment mechanism on the syringe to mount the syringe on the injector.

10 The syringe loader includes a syringe mounting mechanism adapted to cooperate with the attachment mechanism of the syringe to attach the syringe to the syringe loader and a drive member to impart motion to the syringe plunger.

In one embodiment, the drive member of the syringe loader is in operative connection with a manual lever arm. The lever arm can, for example, be in operative connection with the

15 drive member via a linkage assembly. In one embodiment, the syringe loader includes a support frame having a first slot therein. In this embodiment, the lever arm can be rotatably connected to the drive member via a first pin positioned intermediate between the forward end and the rearward end of the lever arm. The first pin travels in the first slot during rotation of the lever arm. The support frame can further include a second slot formed therein. The

20 lever arm in this embodiment has a second pin attached thereto at a position forward of the position of the first pin. The second pin travels in the second slot during rotation of the lever arm.

The syringe loader can also include a mount that is attachable to a surface, such as a wall or a table. Preferably, the support frame is removably attachable to the mount.

25 In still another aspect, the present invention provides a method of injecting a fluid into a patient using a syringe in which an injection fluid loaded into the syringe is pressurized by an injector. The method includes the step of loading the injection fluid into the syringe using a syringe loader that is operable independent of the powered injector.

The method can further include the step of mounting the syringe loader on a surface

30 prior to loading the injection fluid. For example, the syringe loader can be mounted on a wall. The method further includes the steps of attaching the syringe to the syringe loader prior to loading the injection fluid into the syringe and removing the syringe from the syringe



loader after loading of the syringe. The syringe can be attached to the syringe loader in generally the same manner in which the syringe is attached to the injector.

The syringe loading/filling devices, systems and methods of the present invention improve the efficiency of use of personnel, equipment, time and/or space in injection procedures as compared to current practices. Moreover, the syringe loading/filling devices, systems and methods of the present invention are relatively inexpensive to manufacture and implement. Furthermore, spills or leaks of injection fluid often occur during loading of injection fluid. Such spills or leaks of injection fluid can be very harmful to powered injectors if the injection fluid passes into the injector housing. The syringe loading/filling devices, systems and methods of the present invention assist in preventing damage to injectors from such spills or leaks.

Moreover, the syringe loaders of the present invention are readily made suitable for use in or near an MR environment. In that regard, the materials and operation of the syringe loaders of the present invention preferably do not substantially interfere with MRI equipment, and preferably the syringe loader does not experience excessive forces as a result of the relatively strong magnetic fields generated in an MR environment. In general, polymeric materials and nonferrous metals (for example, aluminum or TEFLON® impregnated aluminum) are preferred construction materials for use in the syringe loaders of the present invention when such syringe loaders are to be used in or near an MR environment. Nonferrous metals and/or polymeric materials that are, for example, lubricious, low friction and/or "non-stick" can be used in the syringe mounts or interfaces of the syringe loaders of the present invention. Examples of suitable polymeric materials include polycarbonate and DELRIN® available from E.I. duPont de Nemours & Co. of Wilmington, Delaware.

## BRIEF DESCRIPTION OF THE DRAWINGS

Other aspects of the invention and their advantages will be discerned from the following detailed description when read in connection with the accompanying drawings, in which:

Figure 1 illustrates a perspective view of an embodiment of an injector system including a powered injector and a front-loading syringe;

Figure 2 illustrates a side view of another embodiment of a front-loading injector having a different releasable mounting mechanism;

Figures 3A illustrates a perspective view of a first embodiment of an off-injector syringe loader of the present invention in which the syringe loader is connected to the syringe;

Figure 3B illustrates a perspective view of the syringe loader of Figure 3A in which the syringe has been disconnected from the loader;

5 Figure 3C illustrates a front view of the syringe loader of Figure 3A;

Figure 3D illustrates a perspective view of the plunger extension of the syringe loader of Figure 3A;

Figure 3E illustrates a perspective view of the plunger extension of the syringe loader of Figure 3A aligned with the syringe plunger;

10 Figure 4A illustrates a side, cross-sectional view of a second embodiment of a syringe loader of the present invention with the plunger extension thereof in a rearward or retracted position;

Figure 4B illustrates a side, cross-sectional view of the syringe loader of Figure 4A with the plunger extension thereof in a forward position;

15 Figure 4C illustrates a side, cross-sectional view of a syringe loader of the present invention including powered plunger extension;

Figures 4D illustrates the syringe loader of Figure 4C with a syringe adapter and a plunger adapter for use of an alternative syringe with the syringe loader;

20 Figure 4E illustrates the syringe loader of Figure 4C with a different syringe mount for use of the syringe loader with an alternative syringe;

Figure 5A illustrates a perspective view of another embodiment of a syringe loader of the present invention;

Figure 5B illustrates a perspective, exploded or disassembled view of the syringe loader of Figure 5A;

25 Figure 5C illustrates a top, cross-sectional view of an embodiment of a syringe interface of the syringe loader of Figure 5A with a syringe of a first size connected thereto;

Figure 5D illustrates a top, cross-sectional view of an embodiment of a syringe interface of the syringe loader of Figure 5A with a syringe of a second size connected thereto;

30 Figure 5E illustrates a perspective view of the syringe interface of Figures 5C and 5D in an exploded or disassembled state and in an assembled state;

Figure 5F illustrates a side, cross-sectional view of the syringe loader of Figure 5A;

Figure 5G illustrates one embodiment of a process for mounting the syringe loader of Figure 5A (in which the view of all steps other than step 8 is a top view; step 8 illustrates a side view);

Figure 5H illustrates several alternative embodiments of syringe interfaces suitable for use with the syringe loaders of the present invention;

Figure 5I illustrates top views of one embodiment of a process for using the syringe loader of Figure 5A;

Figure 6A illustrates a side, cross-sectional view of another embodiment of a syringe loader of the present invention in which the syringe loader is set up to advance the plunger;

Figure 6B illustrates side, cross-sectional views of the syringe loader of Figure 6A during a fluid expelling cycle and a fluid loading cycle;

Figure 7A illustrates a front view of another embodiment of a syringe loader of the present invention in which the syringe loader is wall-mountable;

Figure 7B illustrates a side view of an embodiment of a syringe loader similar in operation to the syringe loader of Figure 7A except that the syringe loader includes a stand to support the syringe loader on a surface; and

Figure 7C illustrates a side view of the connector of the syringe loaders of Figures 7A and 7B.

## DETAILED DESCRIPTION OF THE INVENTION

The syringe loading devices (or "syringe loaders") of the present invention can be used in connection with a wide variety of syringes and injectors, including powered injectors. A couple of powered injectors and syringes in connection with which the syringe loader of the present invention can be used are described below.

An embodiment of a front-loading injector system 5 is illustrated in Figure 1. Injector system 5 includes a powered injector 10 and a syringe 20 for injection of, for example, a contrast medium. As illustrated in Figure 1, injector housing 30 of injector 10 preferably includes a first drive member or piston 14 therein which cooperates with a syringe plunger 40 (not shown in Figure 1; see, for example, Figures 3E or 5C) slideably disposed in syringe 20 to inject a fluid from the interior of syringe 20 into a patient.

As used herein, the terms "axial" or "axially" refer generally to, for example, an axis A around which syringe 20 and piston 14 are preferably formed (although not necessarily symmetrically therearound) and to directions collinear with or parallel to such an axis. The terms "proximal" or "rearward" refer generally to an axial or a longitudinal direction toward the end of syringe 20 opposite a syringe tip 26 (from which pressurized fluid exits syringe 20). The terms "distal" or "forward" refer generally to an axial or a longitudinal direction toward the syringe tip 26 of syringe 20. The term "radial" refers generally to a direction normal to an axis such as axis A.

Syringe 20 is removably connected to injector 10 as described, for example, in U.S. Patent No. 5,383,858, the disclosure of which is incorporated herein by reference. In that regard, front-loading injector 10 preferably includes a front portion or interface 60 having a first recess 62 formed therein. Piston or drive member 14 is reciprocally mounted within injector 10 and is extendible through recess 62. Piston 14 preferably includes a piston flange or head 16 to assist in forming a connection with the syringe plunger. Interface 60 includes receiving slots 66a and 66b, which are preferably positioned opposite one another around recess 62. Receiving flanges 68a and 68b are preferably positioned opposite one another and between receiving slots 66a and 66b, and extend inwardly into recess 62.

The rearward end of syringe 20 preferably includes a releasable mounting mechanism such as a pair of mounting flanges 22a and 22b for mounting syringe 20 in a desired position relative to the housing 30 of injector 10. Flange 22a is not well shown in Figure 1 but is generally identical to flange 22b and positioned opposite flange 22b (see, for example, Figure 5C).

To attach syringe 20 to injector 10, the rearward end of syringe 20 is inserted into injector recess 62 such that mounting flanges 22a and 22b are inserted into receiving slots 66a and 66b, respectively. In one embodiment, piston flange 16 is preferably simultaneously aligned to engage a capture mechanism (including, for example, L-shaped capture members 42 and 44 - see, for example, Figures 3E or 5C) on the rear of syringe plunger 40 (as, for example, described in U.S. Patent No. 5,383,858). As clear to one skilled in the art, however, many other plunger and piston designs are possible to connect the piston 14 to the plunger 40.

Once mounting flanges 22a and 22b are inserted into receiving slots 66a and 66b, respectively, and piston 14 is in position to be received by plunger 40, the operator rotates

syringe 20 approximately 90 degrees such that mounting flanges 22a and 22b move behind and are engaged by receiving flanges 68a and 68b, respectively, and piston flange 14 is retained by, for example, L-shaped capture members 42 and 44 on plunger 40 (see, for example, Figure 3E or 5C). Injector 10 may include a stop mechanism (not shown), for example, extending from at least one of the retaining slots 68a and 68b, to prevent rotation of syringe 20 more than 90 degrees. Tactile, visual or audible feedback can be provided to the operator via, for example, cooperating members on syringe 20 and injector 10 to inform the operator that secure connection has been achieved. After securely attaching syringe 20 to injector 10, advancing piston 14 in a forward direction will apply a motive force to plunger 40 to advance plunger 40 forward within syringe 20, thereby forcing the contents of syringe 20 out of syringe tip 26 into the fluid path to the patient. Retracting piston 14 in a rearward direction will cause plunger 40 to move rearward within syringe 20, thereby drawing fluid into syringe 20.

As known in the art, syringes can be attached to a wide variety of front-loading injectors simply through modification of the rearward attachment mechanism of the syringe or through use of syringe adapters. In that regard, Figure 2 illustrates another embodiment of an injector 114 and a syringe 250 having a different releasable mounting mechanism 110 than described above for injector 10. Release mechanism 110 includes a connector housing 124, which contains at least two elements that facilitate connection of syringe 250 to an injector 114. The first element is a flexible ring 126 disposed within release mechanism 110 near front end 120. The second element is a rotating ring 128 disposed within release mechanism 110 near rearward end 116. Flex ring 126 and rotating ring 128 cooperate with one another to permit connection and release of syringe 250 to and from release mechanism 110 (and, accordingly, to and from injector 114). Injector 114 and release mechanism 110 are described in detail in U.S. Patent Application Publication No. 2001-0047153, the contents of which are incorporated herein by reference.

In general flex ring 126 distends to an "open" shape when contacted by a sloped shoulder 260 on a rearward end of syringe 250 and then snaps back to a relaxed state once shoulder 260 passes thereby to retain syringe 250 within releasable mounting mechanism 110. After connection, rotation of syringe 250 about its axis (for example, approximately 90°) causes rotation of rotating ring 128 disposed within release mechanism 110 via cooperation of tab 270 with abutment members or grooves (not shown)

on rotating ring 128. Rotation of ring 128 causes flex ring 126 to distend to its open shape to allow shoulder 260 to pass forward of flex ring 126 for removal of syringe 250 from releasable mounting mechanism 110.

Under current practice, powered injectors such as injector 10 or injector 114 are used to load or fill empty syringes with injection fluid (for example, a contrast medium). As discussed above, this methodology often results in inefficient use of equipment, personnel, time and/or space. Figures 3A-3E illustrate an embodiment of an off-injector, syringe loader 310 that can be used to load injection fluid into, for example, syringe 20 before syringe 20 is mounted upon injector 10. Syringe loader 310 includes a syringe mount 320 to removably attach syringe 20 thereto. In general, syringe 20 is connected to syringe mount 320 in the same way that syringe 20 is mounted to injector 10. In that regard, as best shown in Figure 3B syringe mount 320 includes an opening 322 having receiving slots 326a and 326b positioned around the perimeter thereof. To attach syringe 20 to syringe mount 320 of loader 310, the rearward end of syringe 20 is inserted into opening 322 such that mounting flanges 22a and 22b are inserted into receiving slots 326a and 326b, respectively.

Once mounting flanges 22a and 22b are inserted into receiving slots 326a and 326b, respectively, the operator rotates syringe 20 approximately 90 degrees such that mounting flanges 22a and 22b move behind and are engaged by receiving flanges 328a and 328b, respectively. Tactile, visual or audible feedback can be provided to the operator as described above to inform the operator that secure connection has been achieved. After securely attaching syringe 20 to syringe loader 310, advancing a plunger extension or stem 340 in a forward direction will apply a motive force to the syringe plunger to advance the plunger forward within syringe 20, thereby expelling injection fluid from syringe tip 26. Likewise, retracting plunger extension 340 in a rearward direction will cause the plunger to move rearward within syringe 20, thereby drawing fluid into syringe 20. Syringe loader 310, when syringe 20 is connected thereto, thus operates similarly to a manual syringe and can be manually operated to load a desired amount of injection fluid into syringe 20. The loaded or filled syringe can then be mounted upon injector 10 as described above for injection of the fluid into a patient.

In one embodiment (see Figure 3D), a flange 344 on a distal end of plunger extension 340 preferably engages a capture mechanism such as L-shaped capture members 42 and 44 on the rear of a syringe plunger 40 (see Figure 3E; as, for example, described in U.S.

Patent No. 5,383,858). Preferably, this engagement occurs as syringe 20 is connected to loader 310. For example, plunger extension 340 is preferably in position to be received by plunger 40 when syringe 20 is inserted into opening 320. In that regard, syringe manufacturers typically ship syringes with the syringe plunger in a known position (for example, fully retracted). Loader 310 is preferably designed such that, for example, the fully retracted position of plunger extension 340 positions flange 344 to be received by plunger 40 when syringe 20 is fully inserted within opening 320.

When the operator rotates syringe 20 approximately 90 degrees such that mounting flanges 22a and 22b move behind and are engaged by receiving flanges 368a and 368b, respectively, flange 344 preferably rotates to engage L-shaped capture members 42 and 44. In this embodiment, plunger extension 340 is preferably slidably disposed within loader 310 such that plunger extension 340 cannot rotate about its axis relative to syringe mount 320 to ensure suitable alignment as described above. In the embodiment of Figures 3A through 3E, for example, plunger extension has a generally cross-shaped cross section which is slidably disposed within an correspondingly shaped opening 350 of loader 310 to prevent rotation of plunger extension 340 relative to the remainder of syringe loader 310.

Syringe loader 310 further includes finger grips 360 to facilitate manual operation thereof. Likewise, plunger extension 340 includes a rear flange 348 to facilitate manual operation of syringe loader 310.

Figures 4A and 4B illustrate another embodiment of an off-injector syringe loader 410 of the present invention. Syringe loader 410 includes a syringe mount 420 that operates generally in the manner of the mounting mechanism of interface 60 of injector 10 as well as syringe mount 320. A plunger extension 440, which imparts motion to plunger 40 as described above, is slidably disposed within the housing of syringe loader 410 to pass through a passage in syringe mount 420. Plunger extension 440 is in operative connection with a lever arm 450 via a linkage assembly arm 460. Lever arm 450 is rotatable about axis A" defined, for example, by a pin attached to a base member 470 to which syringe mount 420 is also preferably attached. Lever arm 450 provides mechanical advantage for ease of operation. Base 470 is preferably attachable to a surface (for example, a counter top or a wall) via any suitable attachment means (for example, screws). Figure 4B illustrates rotation of lever arm 450 to a forward position to advance plunger 40 to a forward position within syringe 20. Figure 4A illustrates rotation of lever arm 450 to a rearward position to allow

syringe 20 to be mounted to syringe loader 410 (or to retract plunger 40 to a rearward position within syringe 20).

Figure 4C illustrates an off-injector syringe loader 510, similar in operation to syringe loader 410. However, lever arm 450 of syringe loader 410 is replaced by a powered drive mechanism 550, such as a screw drive. Powered screw drive 550 is operatively connected to plunger extension 440 via a connecting member 560. Drive screw 550 and thereby plunger extension 440 and plunger 40 can, for example, be controlled via a control pad 580. Because syringe loader 510 preferably is not used to inject fluid into a patient, but only to load injection fluid into syringe 20, any control circuitry/software used to operate drive screw 550 can be much less complicated and costly than similar control circuitry/software required in, for example, a powered injector such as injector 10 or injector 114.

Figure 4D illustrates use of an adapter 590 including a forward portion 110' that operates in generally the same manner as releasable mounting mechanism 110 described above to attach syringe 250 thereto. A rearward portion of adapter 590 includes flanges 22a' and 22b' to attach adapter 590 to syringe mount 420 of syringe loader 410 or 510, thereby adapting syringe 250 for use with syringe loader 410 or 510. In the case that capture member 44a of plunger 40a differs from L-shaped capture members 42 and 44 described above, a plunger adapter 594 can be used to connect plunger extension 440 to plunger 40a of syringe 250.

As illustrated in Figure 4E, syringe mount 420 can also be replaced with syringe mounting mechanism 110' to connect syringe 250 directly to syringe loader 510' without use of an adapter. As clear to one skilled in the art, many other sizes and/or types of syringes can be accommodated by the syringe loaders of the present invention by use of corresponding syringe mounts or adapters. A syringe mounting mechanism of the syringe loaders of the present invention can easily be made removable (using, for example, cooperating slots and flanges) to facilitate use of different syringe mounts for different syringes. Moreover, more than one syringe mount can be included in a single syringe mounting mechanism, which can, for example, be slidable or rotatable to bring the appropriate syringe mount for a particular syringe into operation.

Figures 5A through 5I illustrate another embodiment of an off-injector syringe loader 610 of the present invention. Syringe loader 610 includes a syringe mount or syringe interface 700 that operates similar to the manner of the mounting mechanism of interface 60



of injector 10 as well as syringe mounts 320 and 420. However, syringe interface 700, which is discussed in further detail below, is suitable to attach syringes of different size to syringe loader 610 without the use of any adapter(s) and without user manipulation/adjustment of the mechanics of syringe loader 610.

5 Syringe loader 610 includes an outer housing 620 and a support frame 630 housed within housing 620. In one embodiment, housing 630 was fabricated from TEFLON-impregnated aluminum. A plunger extension 640 adapted to impart motion to, for example, plunger 40 (as described above), is slidably disposed within support frame 630 of syringe loader 610 to pass through a passage 720 in syringe mount 700. Plunger  
10 extension 640 is in operative connection with a lever arm 650 via, for example, a pin 660. Lever arm 650 is rotatable to advance or retract plunger extension 640 via a dual slot arrangement as illustrated, for example, in Figure 5B and 5F. In that regard, lever arm 650 is attached to a pin 670 at a forward end thereof. As lever arm 650 is rotated (via, for example, application of force to handle 652) in a forward direction from its rearward position (see, for  
15 example, Figures 5F and 5I) to advance plunger extension 640, pin 670 travels downward (in the orientation of, for example, Figures 5B and 5F) within a slot 632 formed in support frame 630, and pin 660 travels forward within slot 634 formed within support frame 630. The motion of pins 660 and 670 within slots 634 and 632, respectively, and the motion of lever arm 650 are represented by arrows in Figure 5F. Lever arm 650 provides mechanical  
20 advantage for ease of operation. Using the dual slot linkage arrangement of syringe loader 610, the stroke of the lever arm can be reduced as compared to the linkage assemblies used in syringe loaders 410 and 510 while providing similar mechanical advantage. During rotation, lever arm 650 travels through upper slots 638 and 628 formed in support frame 630 and housing 620, respectively.

25 Similar to syringe loader 410, syringe loader 610 preferably includes a base or mounting plate 680, which is preferably attachable to a surface (for example, a counter top or a wall) via any suitable attachment means. Figure 5G illustrates one embodiment of a sequence of steps carried out to mount syringe loader 610 to a wall as follows:

- 30 1. Mounting plate 680 is preferably positioned in a desired location (for example, near the entrance outside of or within an MR room) such that top/forward mounting hole 682a is preferably between approximately 49 inches and

approximately 53 inches from the floor to facilitate use by personnel of different heights. When mounting upon a wall of stud construction, mounting holes 682a and 682b are preferably positioned over a stud.

2. While maintaining mounting plate 680 in a generally vertical position, the locations of mounting holes 682a and 682b can be marked.
3. Pilot holes can then be drilled into the mounting surface at the marked locations for anchorage of suitable mounting hardware for mounting plate 680 as known in the art (for example, 2-1/4 inch tap con screws for wood studs and masonry, or hollow wall anchors for metal studs and drywall).
4. Mounting plate 680 is then affixed to the wall via mounting holes 682a and 682b.
5. After attachment of mounting plate 680 to the wall, support frame 630 is connected to mounting plate 680. In one embodiment (as illustrated in Figures 5A thorough 5G), support frame 630 is slid onto mounting plate 680 until a slot 683 formed in a base flange 636 of support member 630 is fully seated onto an alignment stud 684 projecting from base plate 680.
6. In this embodiment, support frame 630 is then rotated until generally aligned with mounting plate 680, with lever arm 650 at the bottom (in the orientation of Figure 5G).
7. At this point, thumb screws 684a and 684b positioned at the top/rear of support frame 630 are tightened to secure support frame 630 to mounting plate 680. Thumbscrews 684a and 684b can be spring loaded using, for example, springs 685a and 685b.
8. Housing 620 is then slid onto support frame 630 until it is fully seated as shown in Figure 5G.
9. Thumbscrews 622a and 622b positioned at the bottom/front of the housing 620 are then tightened to secure housing 620 to mounting plate 680. Thumbscrews 622a and 622b can be spring loaded using, for example, springs 624a and 624b.

As described above, adapters can be used to attach different types and/or sizes of syringes to the syringe loaders of the present invention. However, attachment of adapters can

use valuable operator time and storage/retrieval of multiple types of adapters can be a problem. Alternatively, a syringe mount or interface that is suitable to attach more than one size of syringe thereto can be provided. Such syringe interfaces are described in U.S. Provisional Patent Application Serial No. 60/317,244, filed on September 5, 2001, assigned to the assignee of the present invention, the disclosure of which is incorporated herein by reference.

In general, such syringe interfaces include a plurality of syringe mount apertures having different dimensions to attach each of a plurality of syringes (equipped with mounting flanges) to the syringe interface. In that regard, each of the plurality of syringes has a different mounting flange dimension. Each of the plurality of syringe mount apertures is in general alignment with the axis of the plunger extension of the syringe loader (or other drive member).

Syringe 20 can, for example, be removably connected to syringe interface 700 generally as described in U.S. Patent No. 5,383,858. In that regard, as best shown in Figure 5E, syringe interface 700 can include a first mount or mount aperture 710 having a first opening 720 formed therein. Plunger extension 640 is reciprocally mounted within syringe loader 610 and is extendible through opening 720. Mount 710 includes receiving slots 722a and 722b, which are preferably positioned opposite one another around opening 720. Receiving flanges 724a and 724b are preferably positioned opposite one another and between receiving slots 722a and 722b and extend inwardly into opening 720.

To attach syringe 20 to syringe loader 610 (see Figure 5C), the rearward end of syringe 20 is inserted into interface 700 (and first mount 710) such that mounting flanges 22a and 22b are inserted into receiving slots 722a and 722b, respectively. In one embodiment, flange 644 of plunger extension 640 preferably simultaneously aligns with and engages capture members 42 and 44 of syringe plunger 40 (as described above) when mounting flanges 22a and 22b are aligned with slots 722a and 722b.

Once mounting flanges 22a and 22b are inserted into receiving slots 722a and 722b, respectively, and plunger extension 640 is in position to be received by the syringe plunger, the operator rotates syringe 20 approximately 90 degrees such that mounting flanges 22a and 22b move behind and are engaged by receiving flanges 724a and 724b, respectively, and syringe plunger 40 is engaged by plunger extension 640. Syringe interface 700 may include one or more stop mechanisms such as, for example, abutment member 726a extending, for

example, from at least one of the retaining flanges 724a and 724b, to prevent rotation of syringe 20 more than 90 degrees. Tactile, visual or audible feedback can be provided to the operator via, for example, cooperating members (not shown) on syringe 20 and syringe interface 700 to inform the operator that secure connection has been achieved. After securely  
5 attaching syringe 20 to syringe interface 700 (and thereby to syringe loader 610), advancing plunger extension 640 in a forward direction will apply a motive force to syringe plunger 40 to advance syringe plunger 40 forward within syringe 20, thereby forcing the contents of syringe 20 out of syringe tip 26. Retracting plunger extension 640 in a rearward direction will cause the syringe plunger to move rearward within syringe 20, thereby drawing fluid into  
10 syringe 20.

As best shown in Figures 5E and 5C, syringe interface 700 also includes at least a second mount or mount aperture 810 having an opening 820 formed therein that is larger than opening 720 and has generally the same center as opening 720. Plunger extension 640 is thus also extendible through opening 820 to cooperate with syringe plunger 40 as described above.  
15 Mount 810 includes receiving slots (only 822a is shown), which are preferably positioned opposite one another around opening 820. Retaining flanges 824a and 824b are preferably positioned opposite one another and between receiving slots 822a and 822b and extend inwardly into opening 820.

To attach a syringe 20' to syringe loader 610 (as shown in Figure 5D), the rearward  
20 end of syringe 20' is inserted into injector opening 820 such that mounting flanges 22a' and 22b' are inserted into receiving slots 822a and 822b, respectively. The diameter/volume of syringe 20' is greater than the diameter of syringe 20. As syringe 20' is moved rearward, it contacts mount 710. Mount 710 is preferably movable (for example, slidable in an axial direction) such that mount 710 moves rearward when contacted by syringe 20'. Axial  
25 rearward movement of mount 710 allows syringe 20' to move rearward and, subsequently, to be rotated relative to mount 810 so that flanges 22a' and 22b' of syringe 20' are rotated into engagement with (i.e., behind) retaining flanges 824a and 824b, as described above for syringe 20 and retaining flanges 724a and 724b.

In one embodiment, mount 710 is attached to or formed integrally with a plate 850  
30 that is slidably mounted on posts 860a and 860b via holes or passages 852a and 852b, respectively, formed in plate 850. Preferably, mount 710 is biased in a forward position as illustrated, for example, in Figure 5C. In the embodiment of Figures 5A through 5I,

springs 870a and 870b are positioned on posts 860a and 860b to bias mount 710 in a forward position. Springs 870a and 870b are retained on posts 860a and 860b by plate 850 and abutment elements 862a and 862b (see Figure 5E) positioned on a rearward end of posts 860a and 860b, respectively.

5 Other syringe interfaces for attachment of syringes of various sizes are suitable for use in the present invention. As described in U.S. Provisional Patent Application Serial No. 60/317,255, filed on September 5, 2001, a syringe interface 890a (see Figure 5H) suitable for use with the syringe loaders of the present invention can also include a plurality of syringe mounts 890aa, 890ab and 890ac that are fixed at different axial positions. Moreover, a  
10 syringe interface 890b can include a generally cone-shaped or frustum-shaped threaded flange 890ba to cooperate with a corresponding threaded flange on each of a plurality of syringes (each syringe size having a frustum-shaped threaded flange of a different diameter). The radius of threaded flange 890ba decreases as one moves rearward within the syringe interface. A syringe interface 890c can also include one or more retention members that are  
15 movable to adjust the radial position of retaining flanges formed on a radially inward end thereof to cooperate with and retain each of a plurality of syringes. For example, each retention member 890ca of the syringe interface 890c can be rotatable in a plane generally parallel to an axis of the syringe to adjust the radial position of retaining flanges 890cb. Alternatively, each retention member 890da of a syringe interface 890d can alternatively be  
20 rotatable in a plane generally parallel to the radius of the syringe to adjust the radial position of retaining flanges 890db.

An example of the use of syringe loader 610 with a 65ml syringe sold by Medrad, Inc, for use with its Spectris® MR injector is illustrated generally in Figure 5I. In this example, the following steps are carried out:

- 25
1. First, unused, empty syringe 20 (or 20') is inserted into syringe interface 700 such that the drip flange 28 of syringe 20 is at the bottom/rear, and the graduations (if any) of syringe 20 are facing right. (When loading syringe 20', mount 710 moves down/rearward as described above.)
  - 30 2. Syringe 20 is then rotated clockwise until it stops (approximately  $\frac{1}{4}$  turn or 90°). The graduations on syringe 20 will now be facing forward.

3. Handle 652 of lever arm 650 is then rotated upward/forward until it stops, thereby advancing plunger 40 to its forward position within syringe 20.
4. Using an appropriate spike/connector, a saline, contrast medium or other injection fluid container 895 is connected to the tip 26 of syringe 20 (preferably using good sterile technique).
5. Handle 652 of lever arm 650 is then pulled downward/rearward until the desired amount of saline or contrast medium has entered syringe 20.
6. Container 895 is then disconnected from syringe 20.
7. Handle 652 of lever arm 650 is then preferably pulled fully downward/rearward until it stops.
8. Syringe 20 is rotated counterclockwise until it stops (approximately  $\frac{1}{4}$  turn or  $90^\circ$ ). (Syringe 20' may be pushed upward/forward upon disconnection as a result of the forward bias of plate 850).
9. Loaded syringe 20 may then be withdrawn from syringe loader 610.

At this point, syringe 20 can be capped (for example, with a cap/connector tube) using good sterile technique. Syringe 20 is preferably labeled to identify loaded medium.

As best illustrated in, for example, Figure 5F, a front face of syringe loader 610 and of syringe interface 700 can be angled at an angle  $\Theta$  or  $\theta$  from the vertical to facilitate runoff of spilled or leaked contrast (and/or other injection media) during a loading procedure as described above in connection with Figure 5I (particularly when the syringe loader is mounted vertically on a wall). Spillage or leakage during loading of syringes is a common occurrence. Indeed, the syringe loaders of the present invention provide the benefit of eliminating the use of injectors to load empty syringes. Contrast media and other injection fluids can damage the internal components of powered injectors. Although to a much lesser extent, buildup of such injection fluids can also be detrimental to the syringe loaders of the present invention.

Figures 6A and 6B illustrate another embodiment of an off-injector syringe loader 910. Syringe loader 910 includes a syringe mount 920 as described above. Syringe loader 910 also includes a plunger extension 940 that operates to impart motion to plunger 40. In this embodiment, plunger extension 940 includes ratchet teeth 942a on an

upper side thereof and ratchet teeth 942b on a lower side thereof. Upper pawls 952a and 952b cooperate with upper ratchet teeth 942a to impart forward motion to plunger extension 940. Lower pawls 954a and 954b cooperate with lower ratchet teeth 942b to impart rearward motion to plunger extension 940. In that regard, a rotating grip handle 950 rotates about a point C within housing 914 of syringe loader 910. Pawl 952b is rotatably attached to handle 950 at a point D on a first side of (for example, in the orientation of Figure 6A, above) point C, while pawl 954a is rotatably attached to handle 950 at a point E on a second side of (for example, in the orientation of Figure 6A, below) point C.

The position of a carriage 960 is vertically adjustable (using, for example, an adjustment knob 964) to a first position (illustrated in Figure 6A) to bring upper pawls 952a and 952b into operative connection with plunger extension 940 or to a second position (illustrated in the lower portion of Figure 6B) to bring lower pawls 954a and 954b into operative connection with plunger extension 940. Pawls 952a, 952b, 954a and 954b are preferably biased towards an engagement position (using, for example springs) as known in the mechanical arts unless prevented therefrom by carriage 960. Pawls 952a and 954b preferably are not provided motive force by rotation of handle 950, but are present to help ensure that plunger extension 940 does not move in a direction other than as determined by the position of carriage 960.

Figure 6B illustrates the use of rotating handle 950 to expel and load injection fluid into a syringe. Depending on the position of carriage 960, the same pumping, gripping motion can either advance plunger extension 940 or retract plunger extension 940, as illustrated in Figure 6B. Syringe loader 910 includes a stationary grip handle 970 that is gripped by the thumb of the users hand. During use of syringe loader 910, the user grips rotating handle 950 with the finger tips of the same hand and either advances or retracts plunger 40 (depending on the position of carriage 960) by alternatively closing and opening and gripping handle 950, similar to the motion used with common caulking guns. Rotating handle 950 is preferably biased in an "open" position (using, for example a spring (not shown)) with the lower end thereof rotated away from stationary handle 970, as illustrated in the left-hand portion of Figure 6B.

Figures 7A through 7C illustrate an embodiment of an off-injector syringe loader in which gas pressure is used to force injection fluid into syringe 20. In this embodiment, syringe loader 1010 does not attach to a rear mounting mechanism of a syringe (for example,

flanges 22a and 22b of syringe 20) as described above for syringe loaders 310, 410, 510, 510', 610 and 910. Instead, syringe loader 1010 includes a connector 1020 that connects a source of injection fluid (for example, contrast media bottle 1100) with syringe 20. Connector 1020 includes a connection mechanism 1022 on one end thereof to connect to  
5 syringe tip 26. Connection mechanism 1022 can, for example, include a luer connection as known in the medical arts. Conduit or passage 1024 of connector 1020 is brought into fluid connection with the interior of syringe 20 when connector 1020 is attached to, for example, syringe 20 or syringe 250. Connector 1020 is readily modifiable to attach to virtually any syringe design. A second connection mechanism 1026 is positioned on another end of  
10 connector 1020. In the embodiment of Figures 7A through 7C, connection mechanism 1026 includes a spike for connecting connector 1020 to contrast bottle 1100 which includes a septum 1110.

Connector 1020 includes a passage therethrough to place contrast bottle 1100 and syringe 20 in fluid connection when both are connected to connector 1020. Connector 1020  
15 also includes an inlet 1028 to permit a pressurized gas to enter contrast bottle 1100. In one embodiment, pressurized air is used via connection of inlet 1028 to an air bladder 1030 that is in fluid connection with, for example, a ball pump 1034 to pressurize air. Preferably, a check valve 1038 is placed between air bladder 1030 and inlet 1028 to substantially prevent flow of air from inlet 1028 to air bladder 1030. Connector 1020 also preferably includes a valve such  
20 as a push valve 1040 that is closed during pressurization of contrast bottle 1100 via air bladder 1030 and ball pump 1034 to prevent air from passing into syringe 20. Once contrast bottle 1100 is sufficiently pressurized by pumping air therein, push valve 1040 is opened to allow pressurized contrast medium to flow into syringe 20 via conduit 1024.

Contrast bottle 1100 is preferably in a generally inverted position as illustrated in  
25 Figures 7A and 7B during the loading process to ensure that the pressurized gas (for example, air) rises to the bottom of contrast bottle 1100 and above the spike to prevent gas from passing into syringe 20. Moreover, the inverted orientation of contrast bottle 1100 allows gravity to assist in the filling of syringe 20. The top (that is, the opening) of inverted contrast bottle 1100 can, for example, rest within a generally cylindrical retainer or support 1050  
30 provided on connector 1020 during the loading process.

Preferably, connection mechanism 1022 includes an outer portion 1023 that passes over syringe tip 26 during connection of connector 1020 to syringe 20. Conduit 1024 is



preferably housed within outer portion 1023 such that conduit 1024 does not extend outside of (that is, beyond the lower edge of) outer portion 1023 to assist in preventing contaminants from contacting conduit 1024 (for example, during connection of connector 1020 to syringe 20), thereby assisting in maintaining the sterility of syringe 20.

5           In the embodiment of Figure 7A, syringe loader 1010 is attached to a mounting base 1060 that is preferably adapted to mount syringe loader 1010 to a wall. A syringe retainer 1070 is attached to mounting base 1060 to retain syringe 20 during loading. In the embodiment of Figure 7B, syringe loader 1020 is attached to a standing base unit 1080. Syringe retainer 1070 is attached to standing base unit 1080. Gradation members 1090 that  
10           are syringe dependent can be provided to assist in loading a desired amount of fluid into syringe 20.

          The foregoing description and accompanying drawings set forth the preferred embodiments of the invention at the present time. Various modifications, additions and alternative designs will, of course, become apparent to those skilled in the art in light of the  
15           foregoing teachings without departing from the scope of the disclosed invention. The scope of the invention is indicated by the following claims rather than by the foregoing description. All changes and variations that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

## WHAT IS CLAIMED IS:

1. A device for loading a fluid into a syringe comprising a body having a plunger slidably disposed therein and an attachment mechanism associated with the body for attaching the syringe to an injector comprising a mounting mechanism adapted to cooperate with the attachment mechanism on the syringe to attach the syringe on the injector, the device comprising:

a syringe mounting mechanism adapted to cooperate with the attachment mechanism of the syringe to attach the syringe to the device; and

a drive member adapted to impart motion to the syringe plunger;

characterized in that

the attachment mechanism of the syringe is adapted to cooperate with the syringe mounting mechanism of the device to attach the syringe to the device and the injector attachment mechanism of the injector to attach the syringe to the injector.

2. The device of Claim 1 wherein the drive member comprises a flange on a rearward end thereof that is manually operated by a user during loading.

3. The device of Claim 1 wherein the drive member is linked to a lever arm, the lever arm being movable to impart reciprocal linear motion to the syringe plunger.

4. The device of Claim 1, further comprising a source of motive power for powering the drive member.

5. The device of Claim 4 wherein the source of motive power comprises a powered screw drive.

6. The device of Claim 1 wherein the drive member comprises ratchet teeth and the device further comprises a rotating handle that is rotatable about an axis, the rotating handle having attached thereto on a first side of the axis a first pawl, the rotating handle having attached thereto on a second side of the axis a second pawl.

7. The device of Claim 6, further comprising a mechanism to move only one of the first pawl and the second pawl into cooperation with the ratchet teeth of the drive member at a given time.

8. The device of Claim 7 whereby rotation of the handle in a first direction causes forward movement of the drive member when the first pawl is brought into cooperation with the ratchet teeth and rotation of the handle in the first direction causes rearward movement of the drive member when the second pawl is brought into cooperation with the ratchet teeth.

9. The device of Claim 8 wherein the rotating handle is biased in a second direction, opposite of the first direction.

10. The device of Claim 1, further comprising a support frame defining a first slot therein, the lever arm being rotatably connected to the drive member via a first pin positioned intermediate between the forward end and the rearward end of the lever arm, the first pin traveling in the first slot during rotation of the lever arm.

11. The device of claim 10 wherein the support frame further defines a second slot therein, the lever arm having a second pin attached thereto at a position forward of the position of the first pin, the second pin traveling in the second slot during rotation of the lever arm.

12. The device of Claim 11, further comprising a mount that is attachable to a surface.

13. The device of Claim 12 wherein the support frame is removably attachable to the mount.

14. A method of preparing a syringe for connection to an injector, the method comprising:

connecting a syringe to a syringe loading device of any of Claims 1-13;

connecting a fluid source to the syringe;

loading fluid from the fluid source into the syringe;

disconnecting the fluid source from the syringe;

disconnecting the syringe from the syringe loading device; and

connecting the syringe to the injector.

15. The method of Claim 14, further comprising:

mounting the syringe loading device on a surface.

16. The method of Claim 14 wherein the loading step comprises retracting a plunger within the syringe.

17. A system comprising:

a syringe;

a powered injector to pressurize a fluid loaded into the syringe; and

a syringe loading device of any of Claims 1-13 to load the fluid into the syringe.

18. The system of Claim 17 wherein the syringe loading device is operable independent of the powered injector.

19. The system of Claim 17, further comprising a control unit operably associated with the syringe loading device and the injector.

20. A syringe loader for loading an injection fluid into a syringe comprising a syringe tip, the syringe loader comprising:

a connector to connect a source of injection fluid to the syringe tip, the connector comprising a first connection mechanism to connect to the syringe tip, a second connection mechanism to connect to the source of injection fluid, a valve to open and close the fluid connection between the source of injection fluid and the syringe tip and an inlet between the valve and the second connection mechanism, the inlet adapted to pass a pressurized gas into the source of injection fluid when the valve is closed.

21. The syringe loader of Claim 20 wherein the valve is openable after pressurized gas is passed into the source of injection fluid so that injection fluid is forced into the syringe via the syringe tip by the pressurized gas within the source of contrast fluid.

22. The syringe loader of Claim 21, further comprising an air pump in fluid connection with the inlet to pass pressurized air into the source of injection fluid.

23. The syringe loader of Claim 22 wherein the air pump comprises a ball pump in fluid connection with a bladder.

1/23

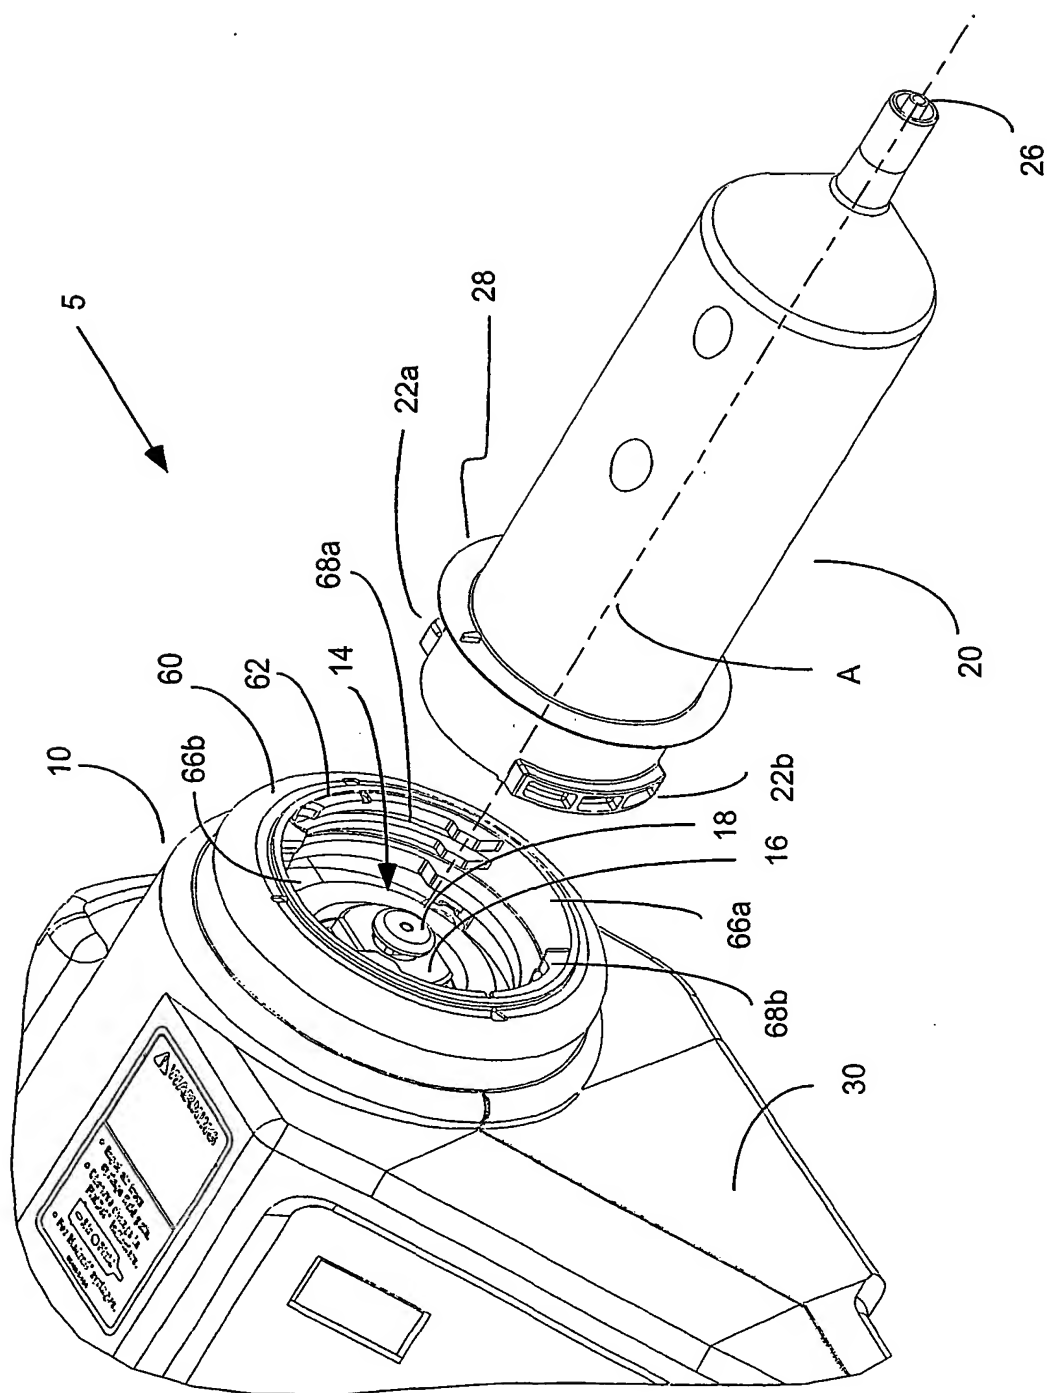


Fig. 1

**THIS PAGE BLANK (USPTO)**

2/23

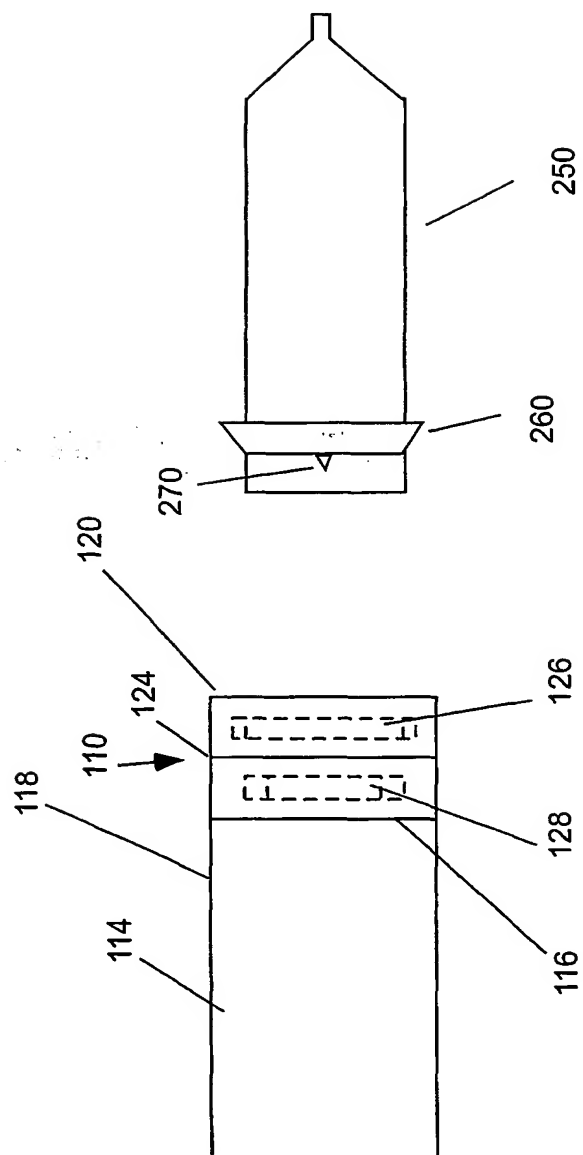


Fig. 2

**THIS PAGE BLANK (USPTO)**



3/23

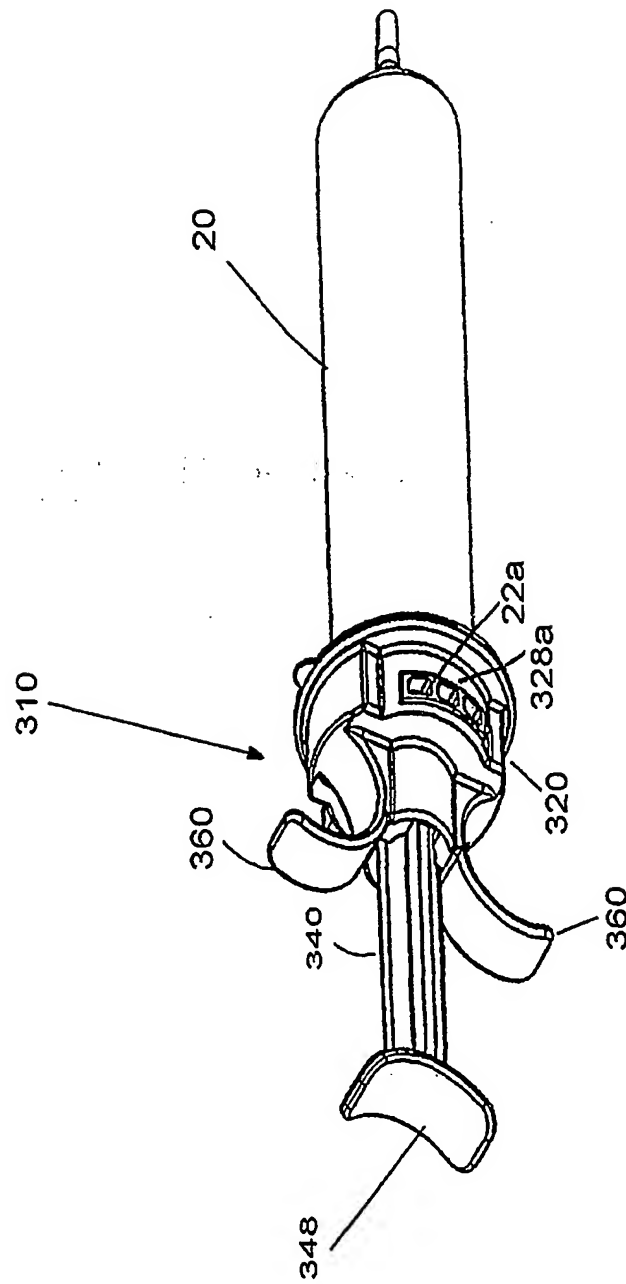


FIG. 3A

**THIS PAGE BLANK (USPTO)**

4/23

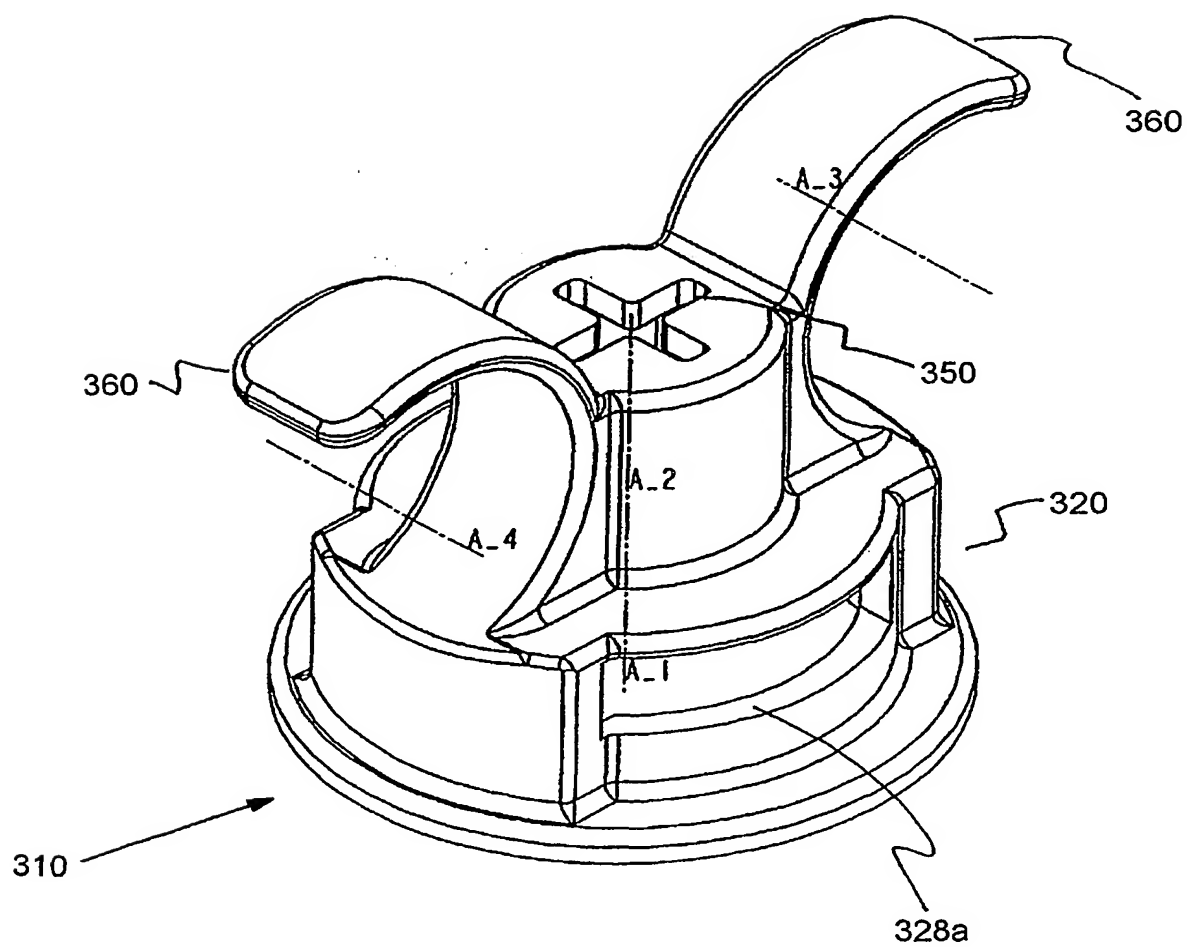


FIG. 3B

**THIS PAGE BLANK (USPTO)**

5/23

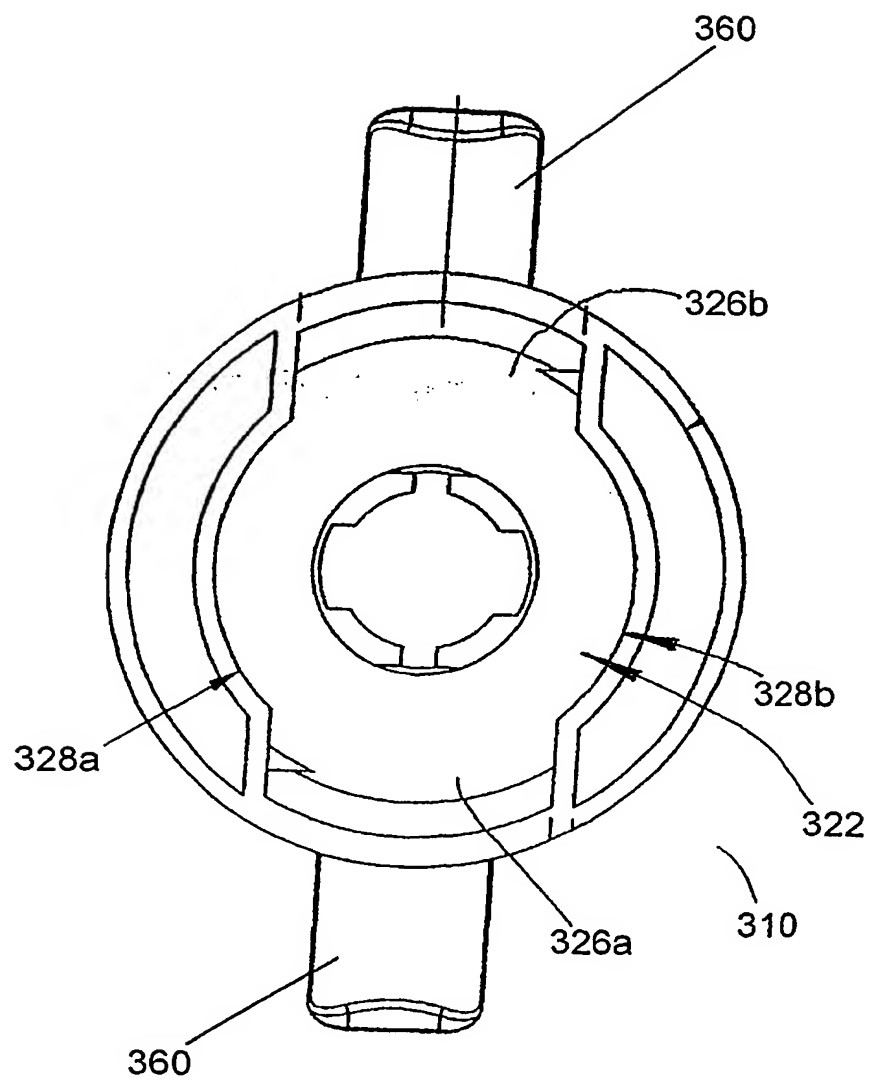


FIG. 3C

**THIS PAGE BLANK (USPTO)**

6/23

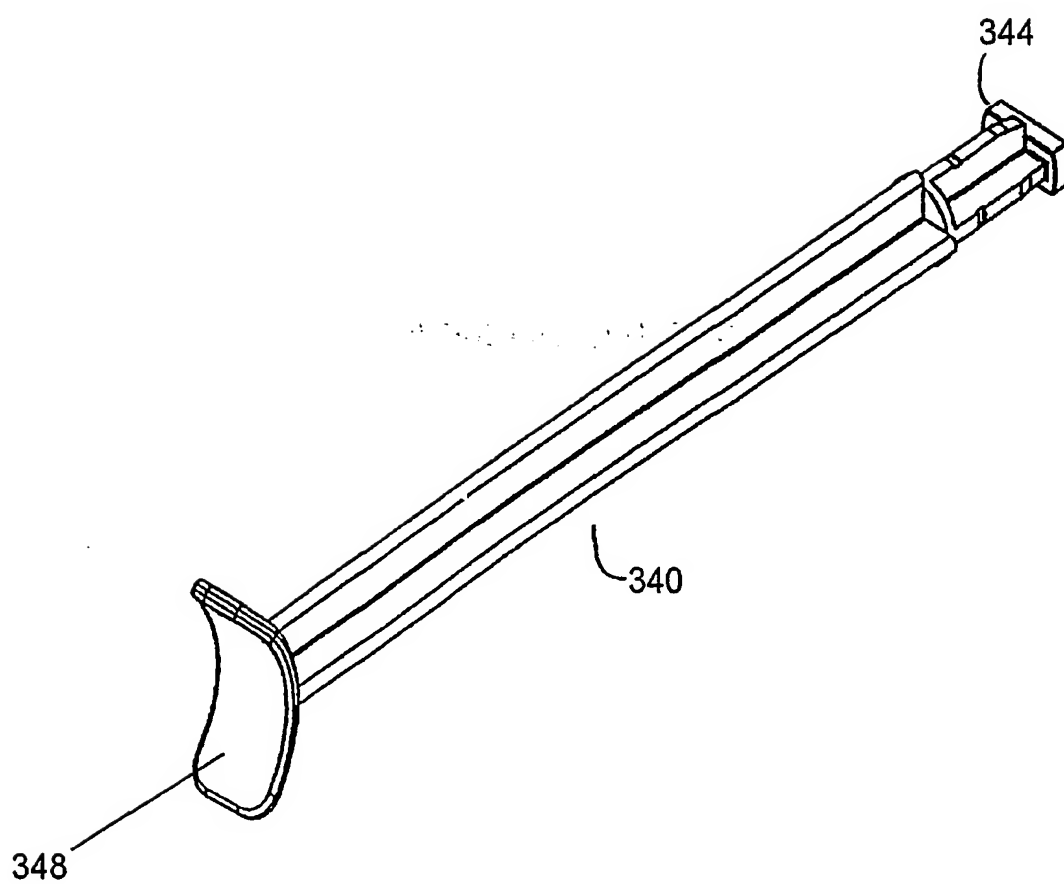


FIG. 3D

**THIS PAGE BLANK (USPTO)**



7/23



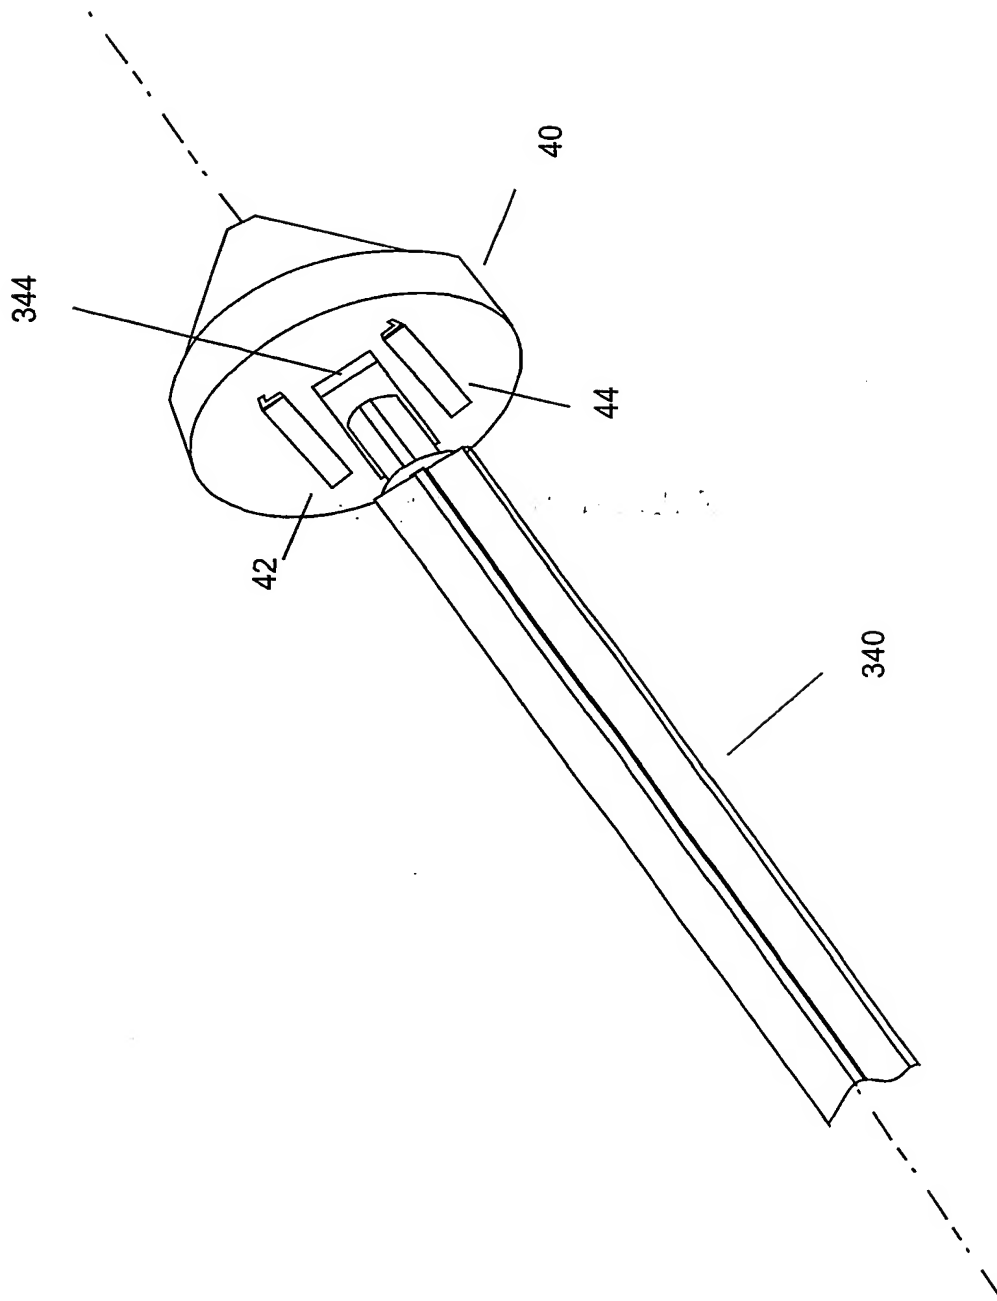


Fig. 3E

**THIS PAGE BLANK (USPTO)**

8/23

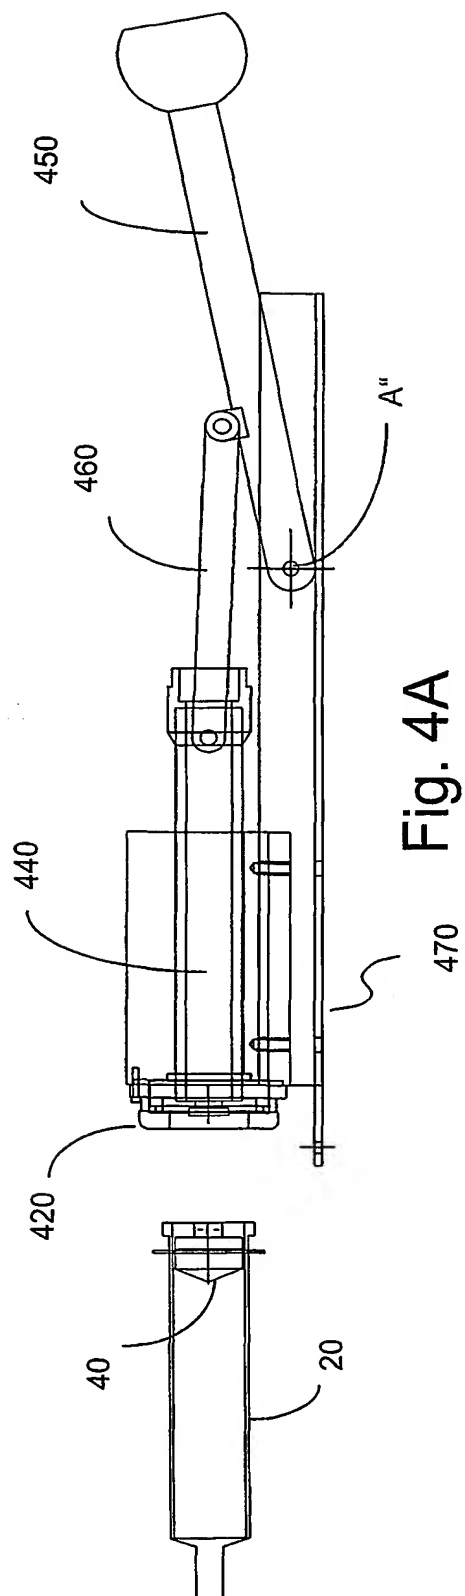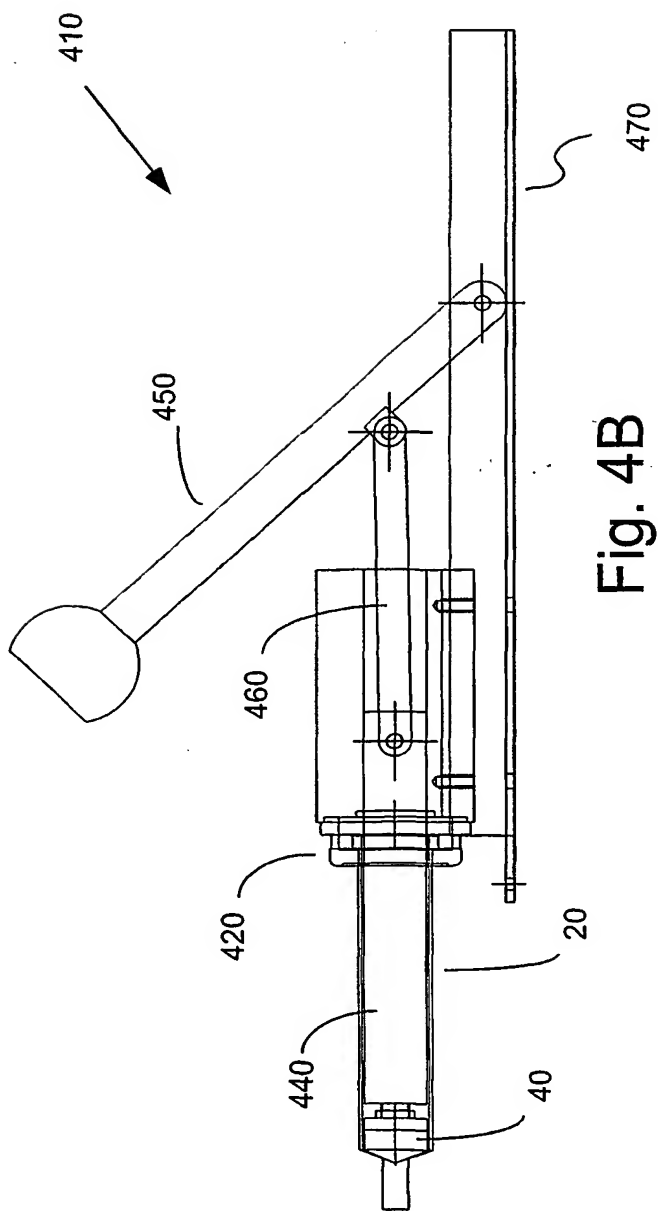

**THIS PAGE BLANK (USPTO)**

9/23

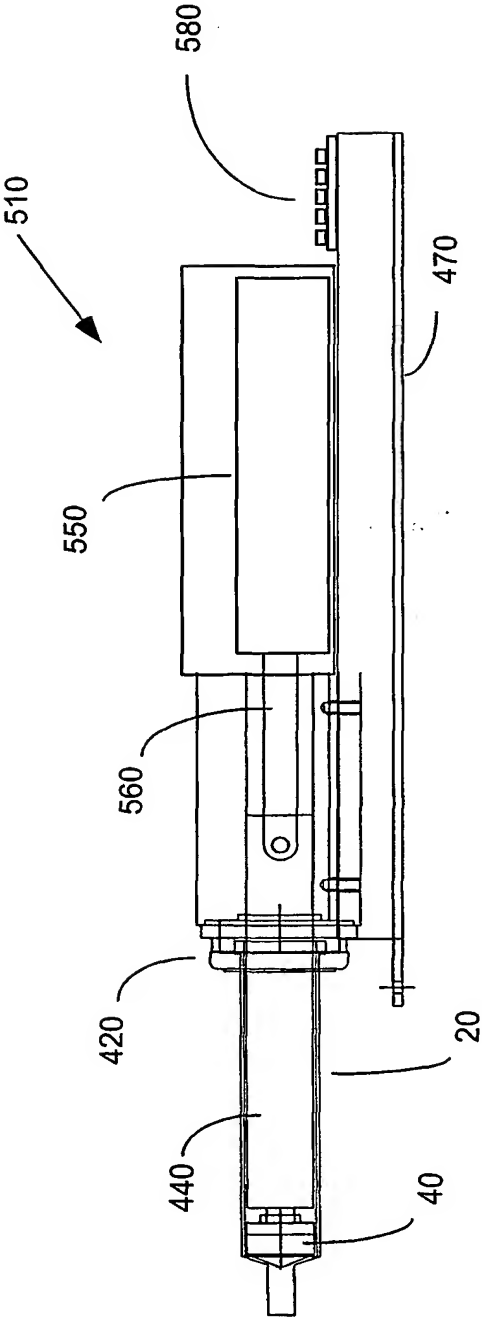


Fig. 4C

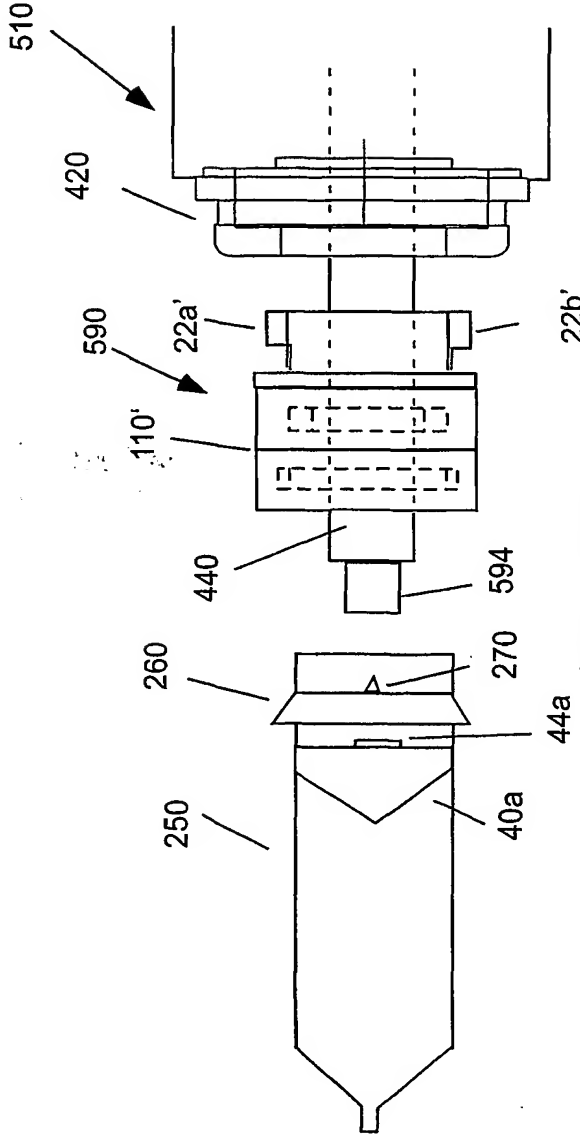


Fig. 4D

**THIS PAGE BLANK (USPTO)**

10/23

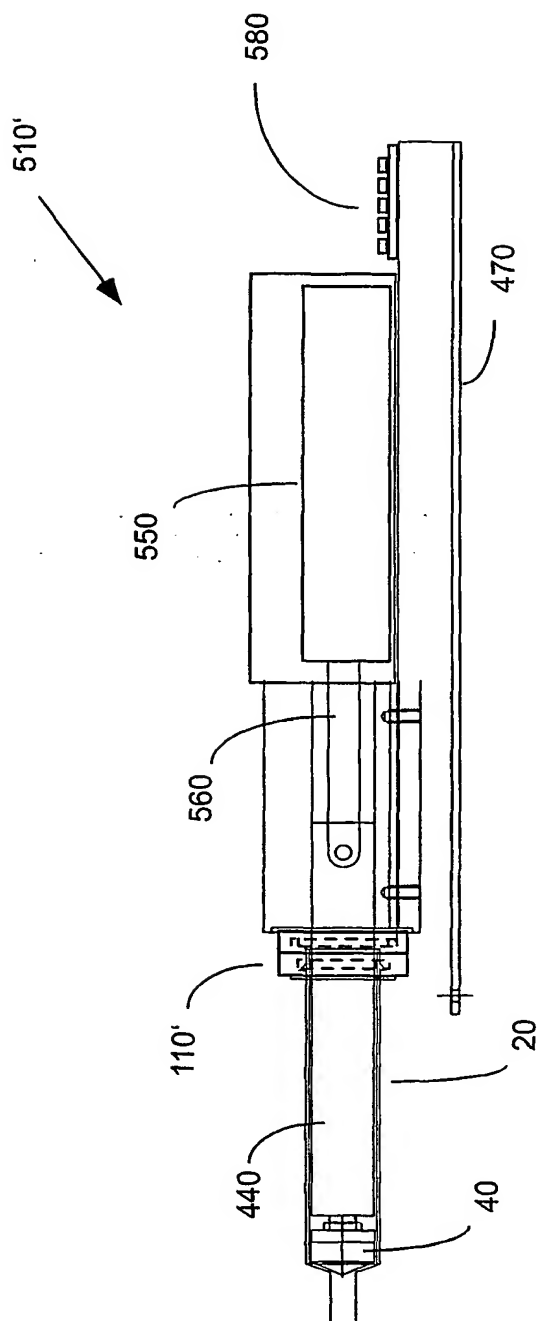


Fig. 4E

**THIS PAGE BLANK (USPTO)**



11/23


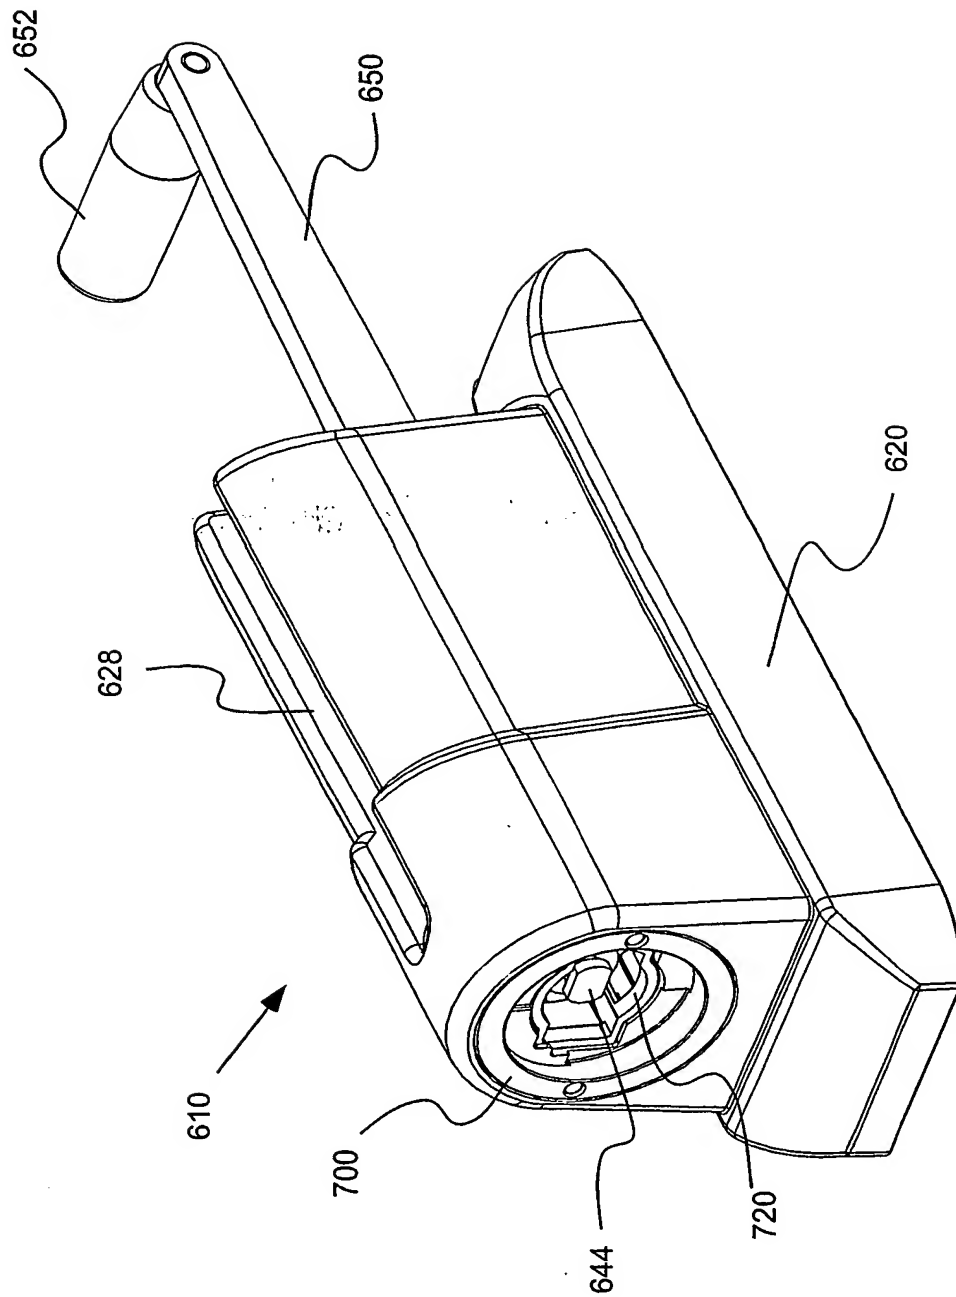


Fig. 5A


**THIS PAGE BLANK (USPTO)**

12/23

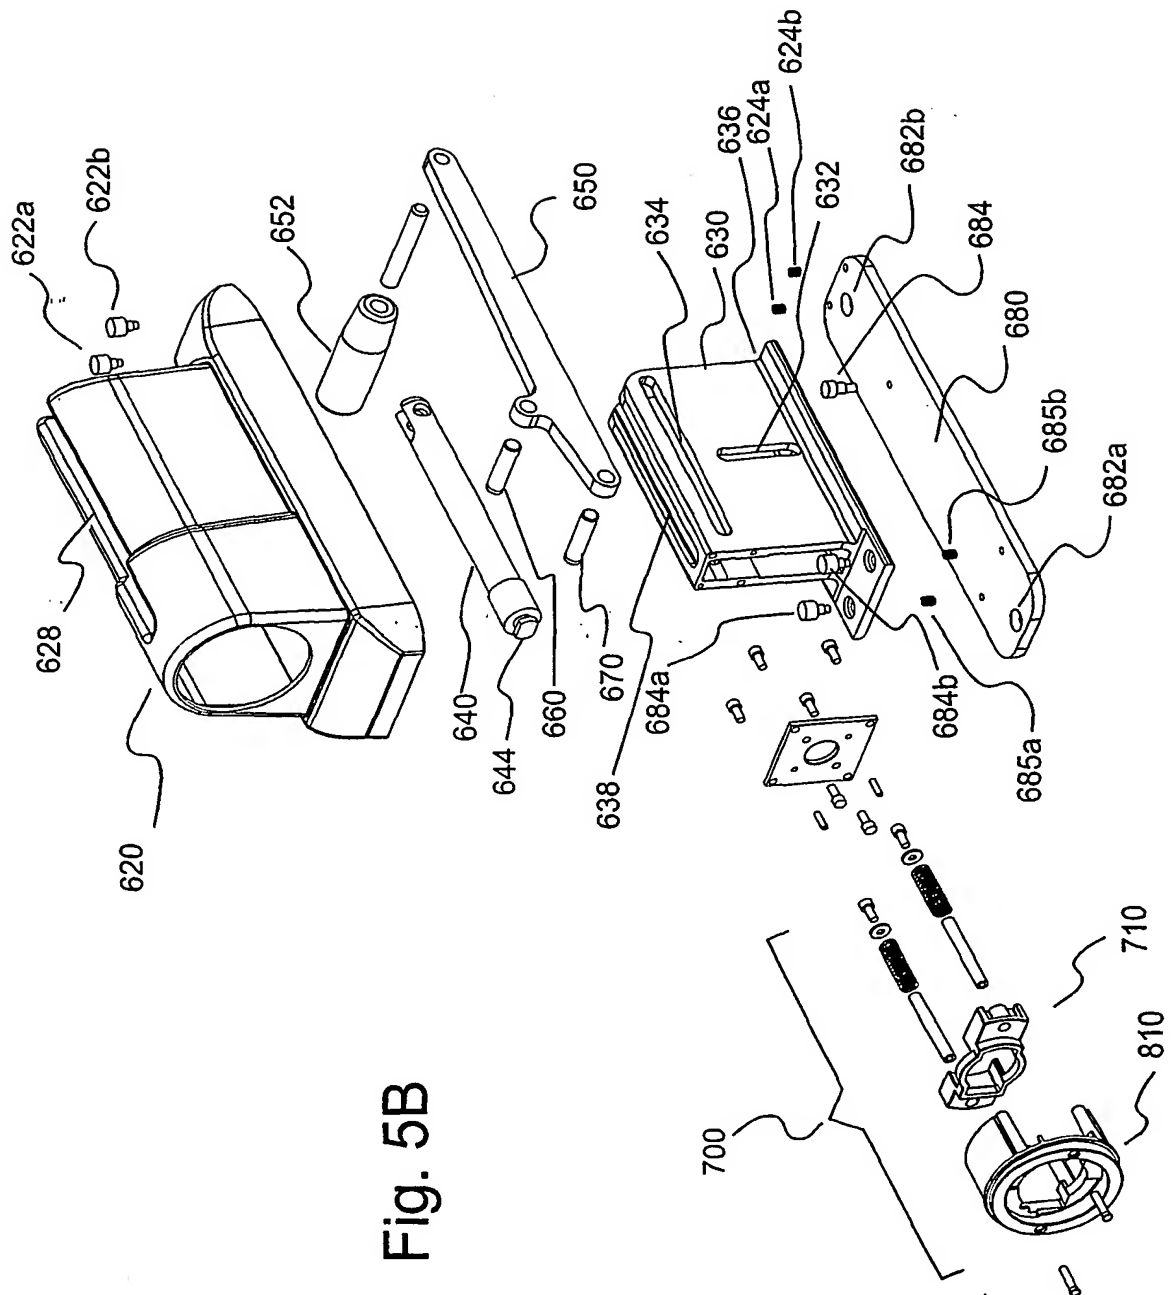


**THIS PAGE BLANK (USPTO)**

13/23

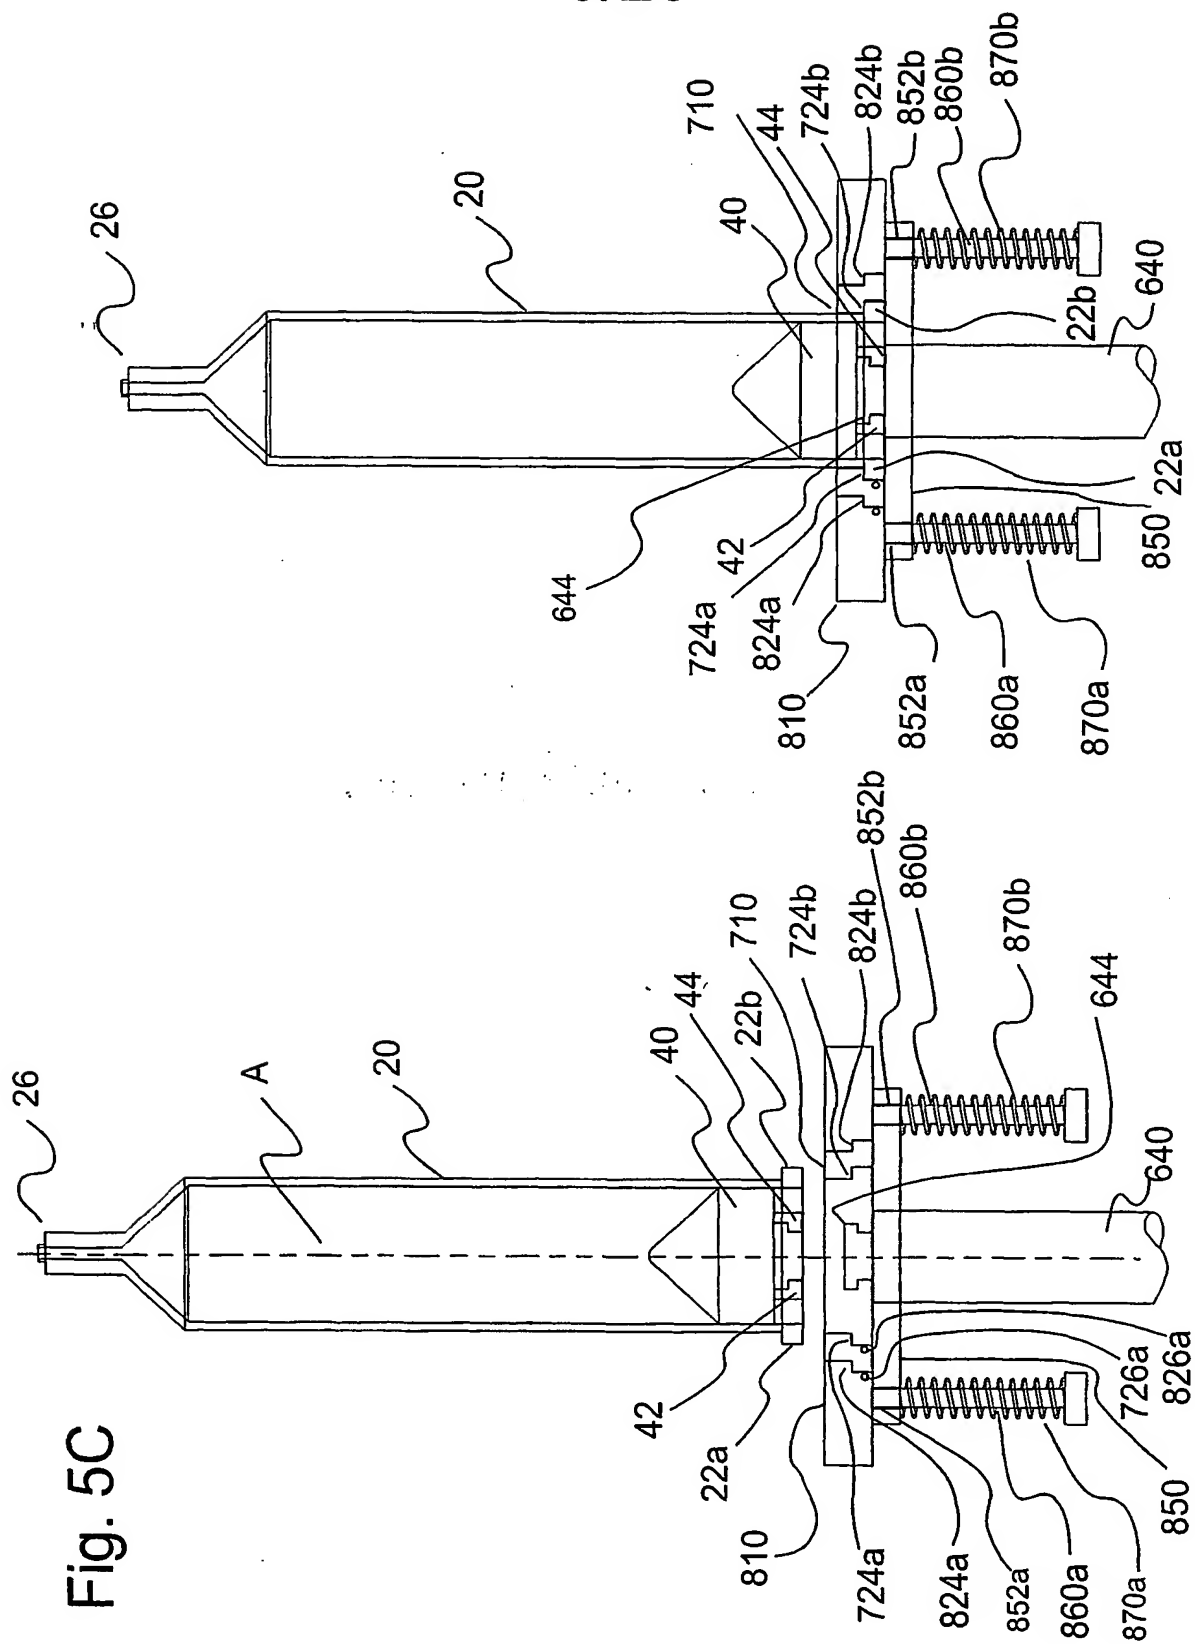

**THIS PAGE BLANK (USPTO)**

14/23

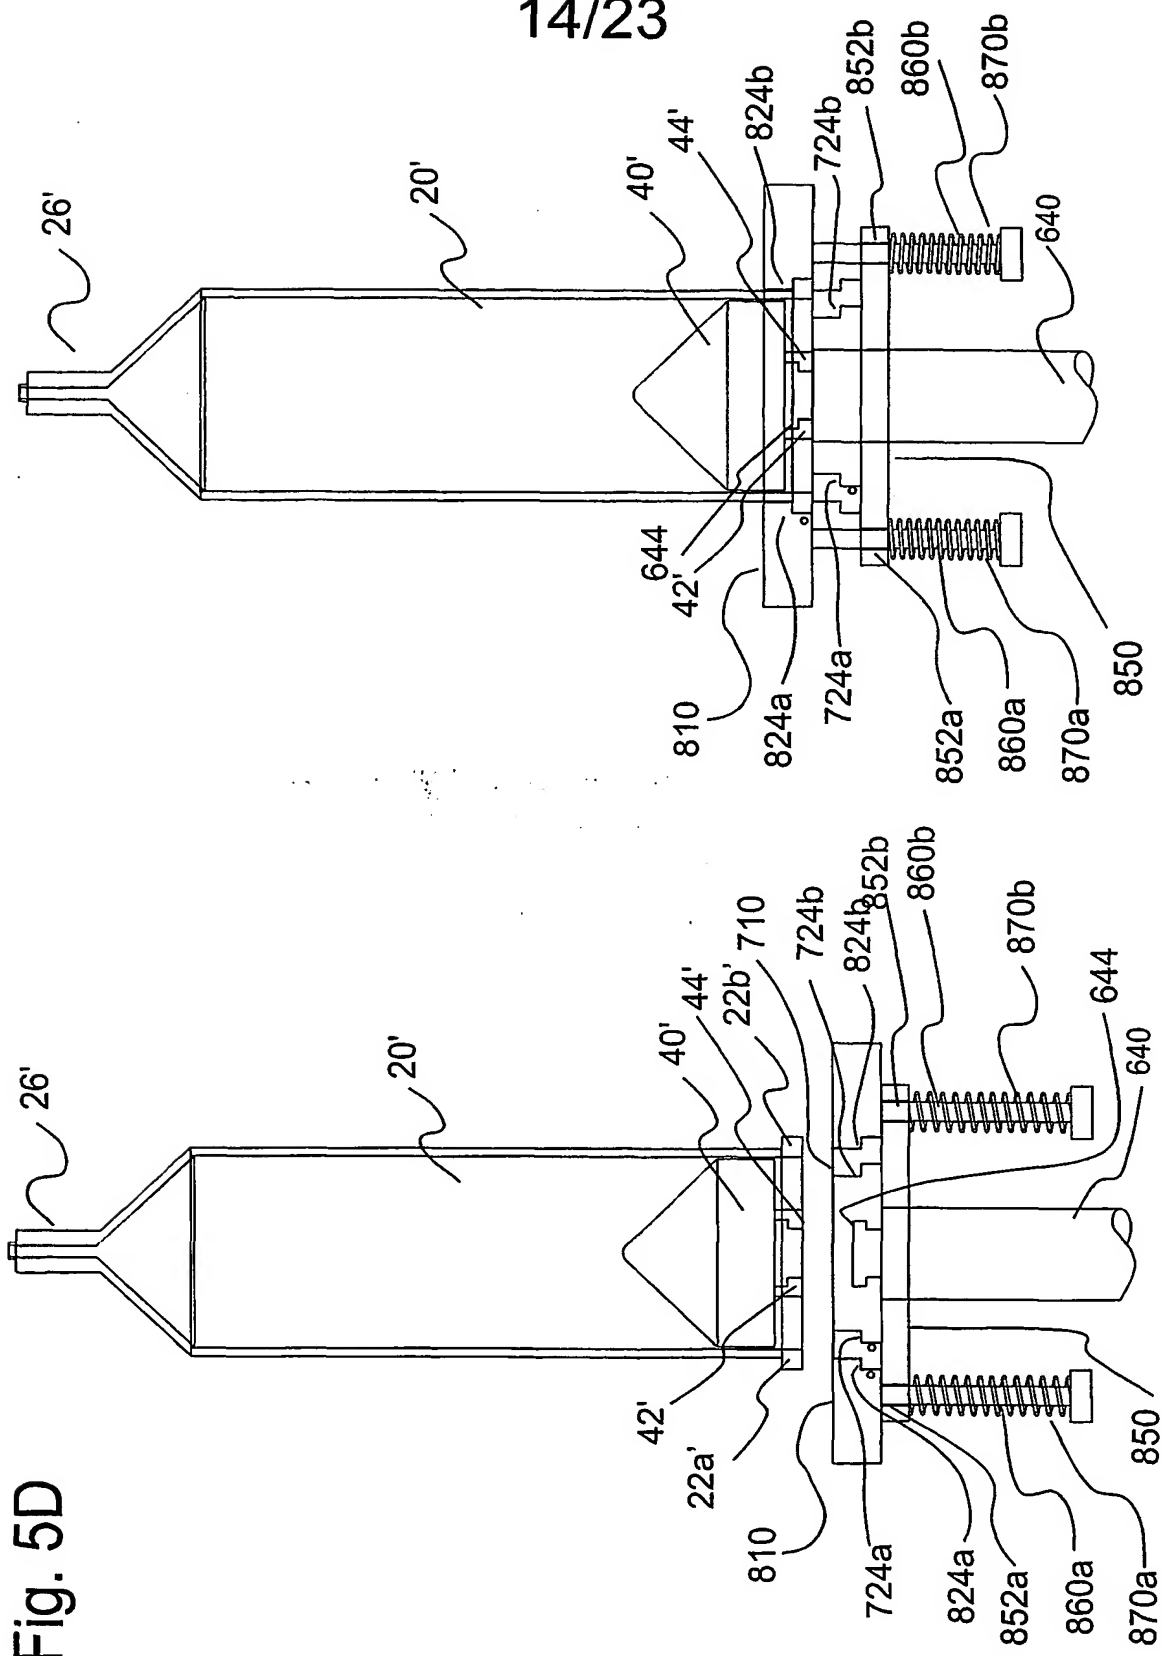


**THIS PAGE BLANK (USPTO)**





**THIS PAGE BLANK (USPTO)**

16/23

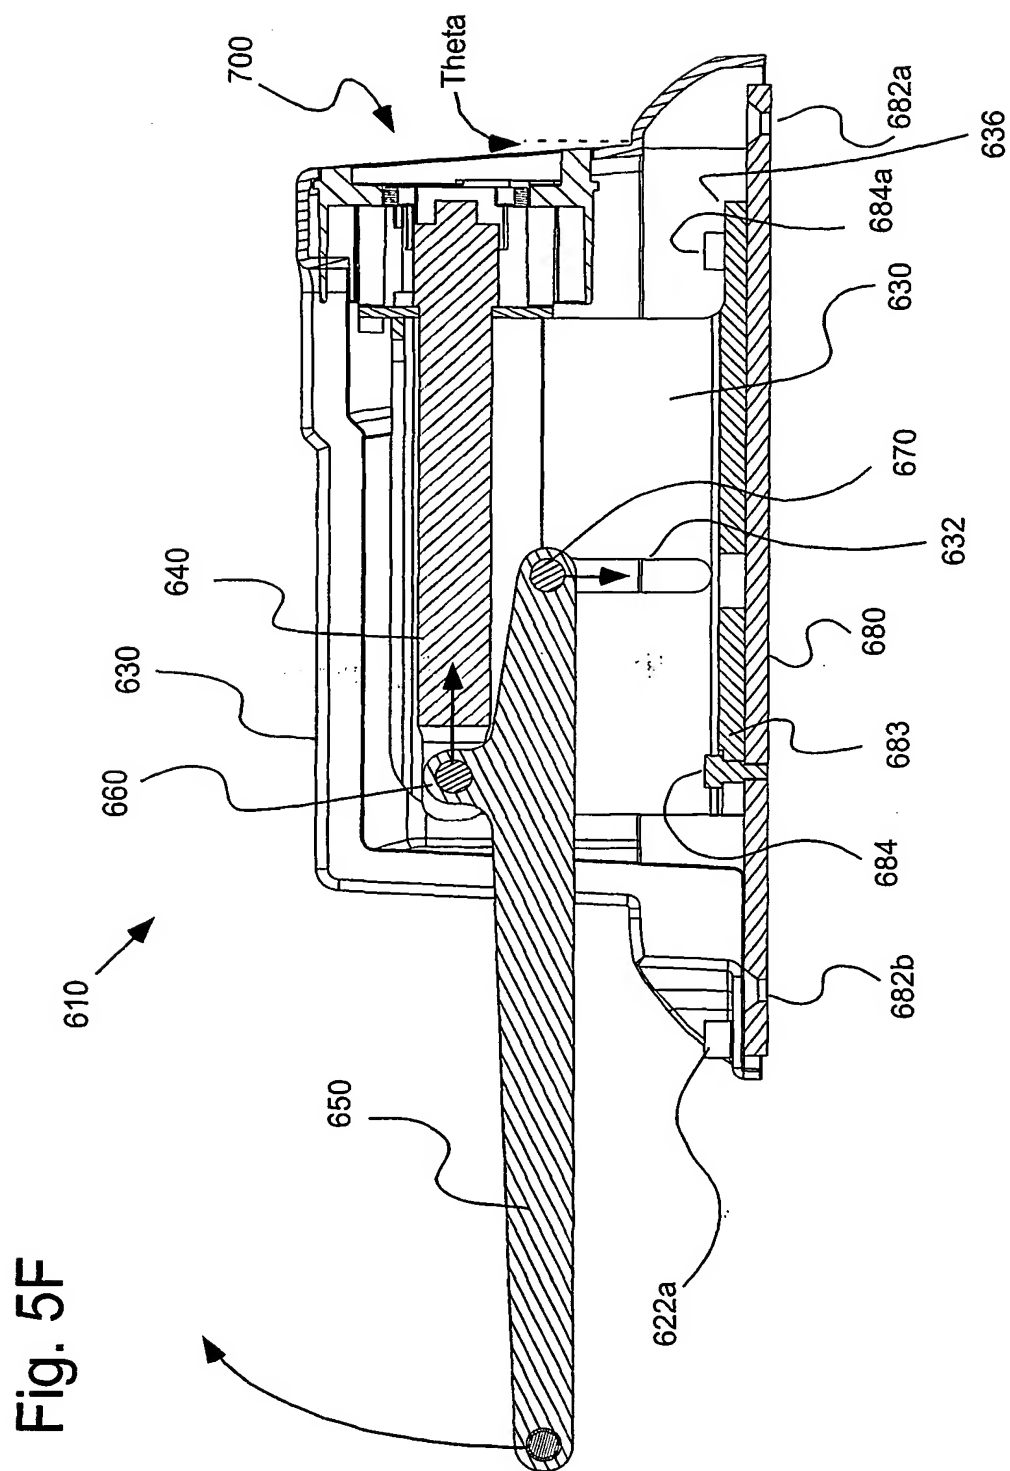

**THIS PAGE BLANK (USPTO)**

17/23

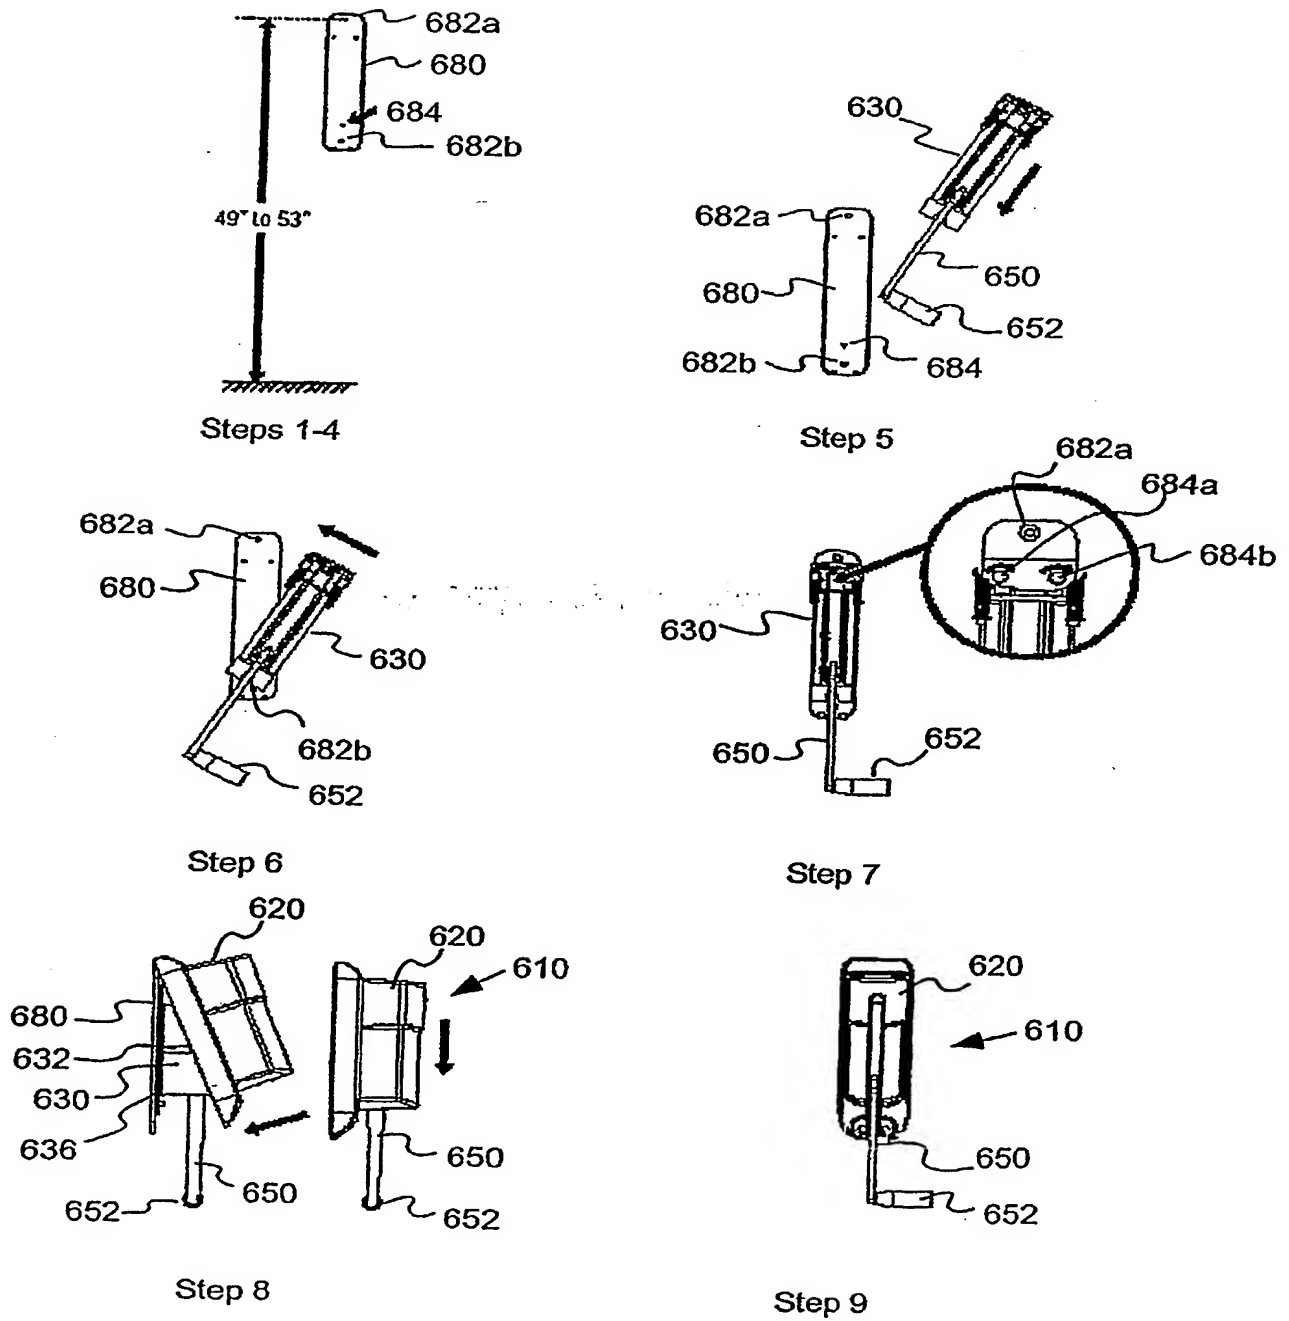


FIG. 5G

**THIS PAGE BLANK (USPTO)**

18/23

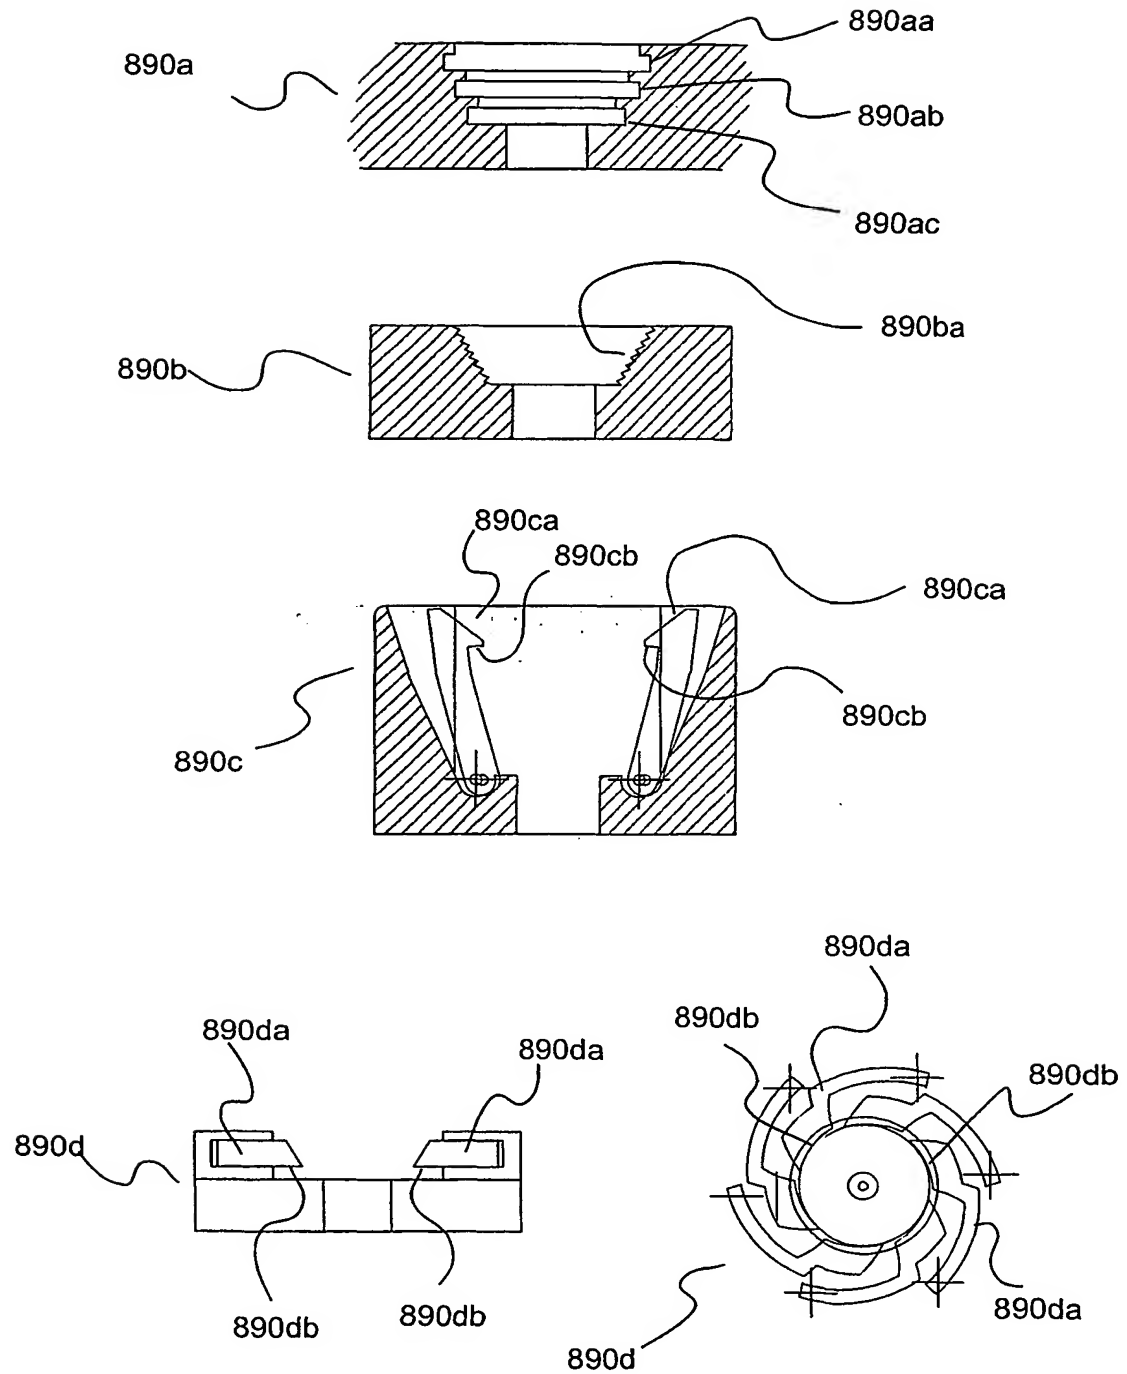


Fig. 5H

**THIS PAGE BLANK (USPTO)**



19/23

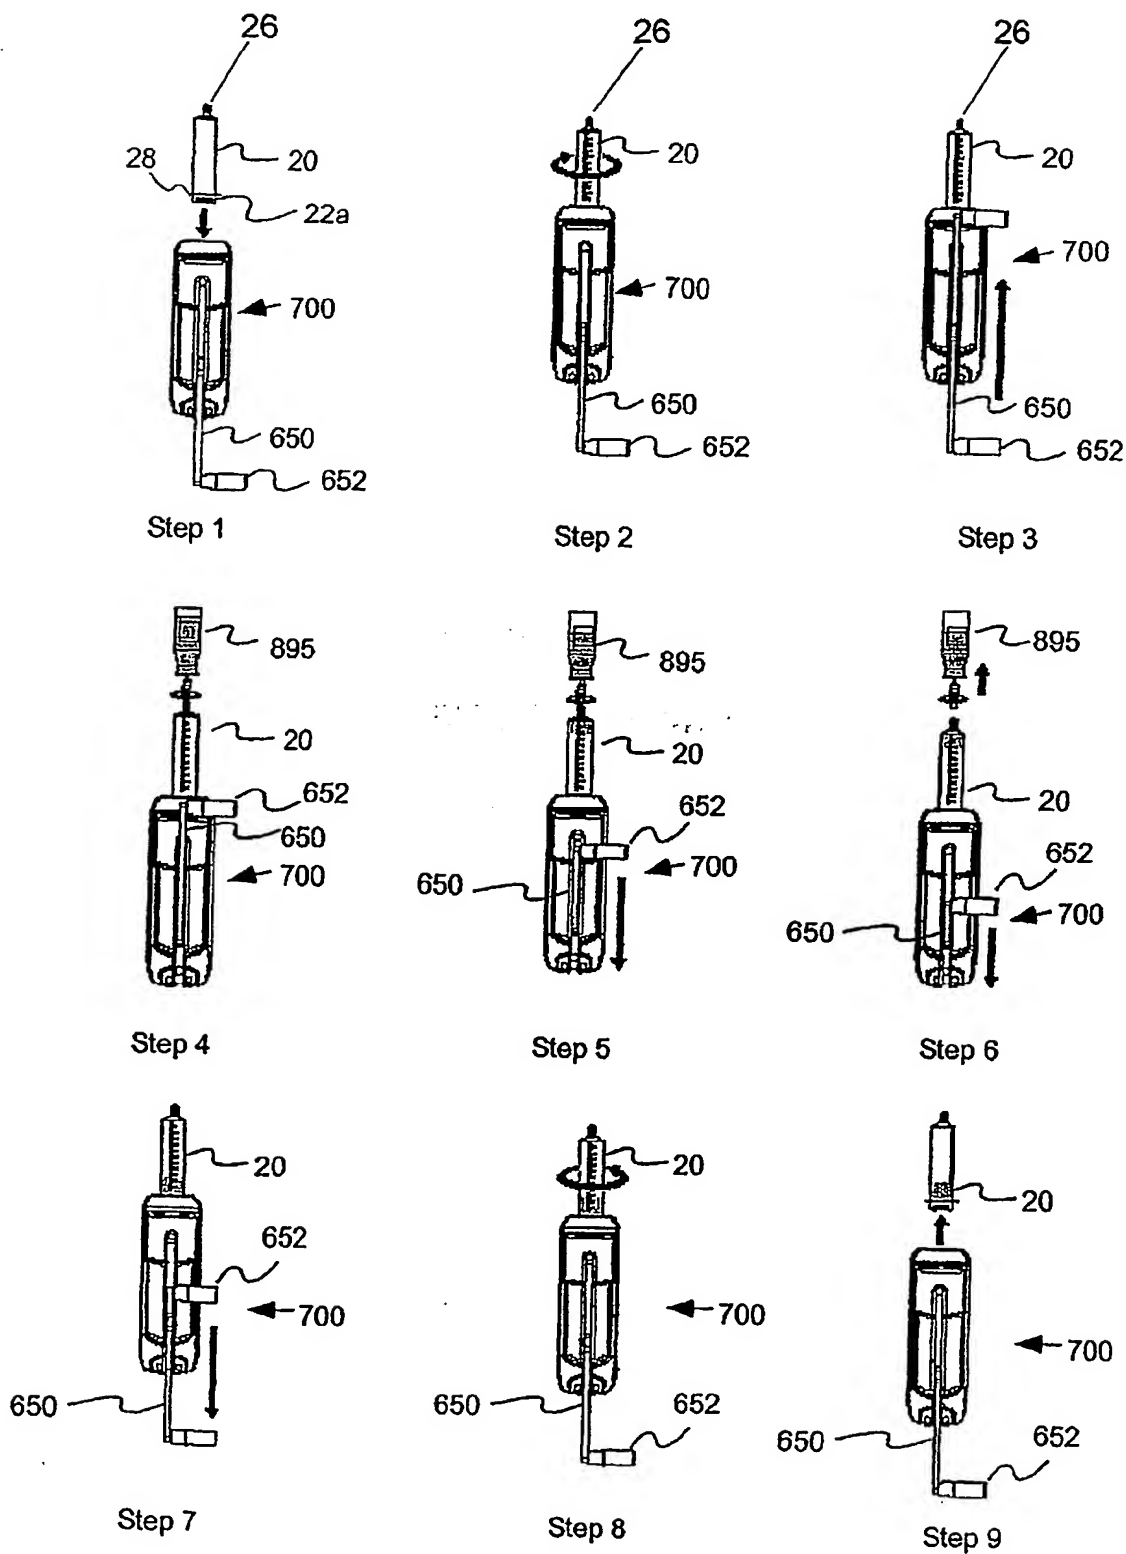
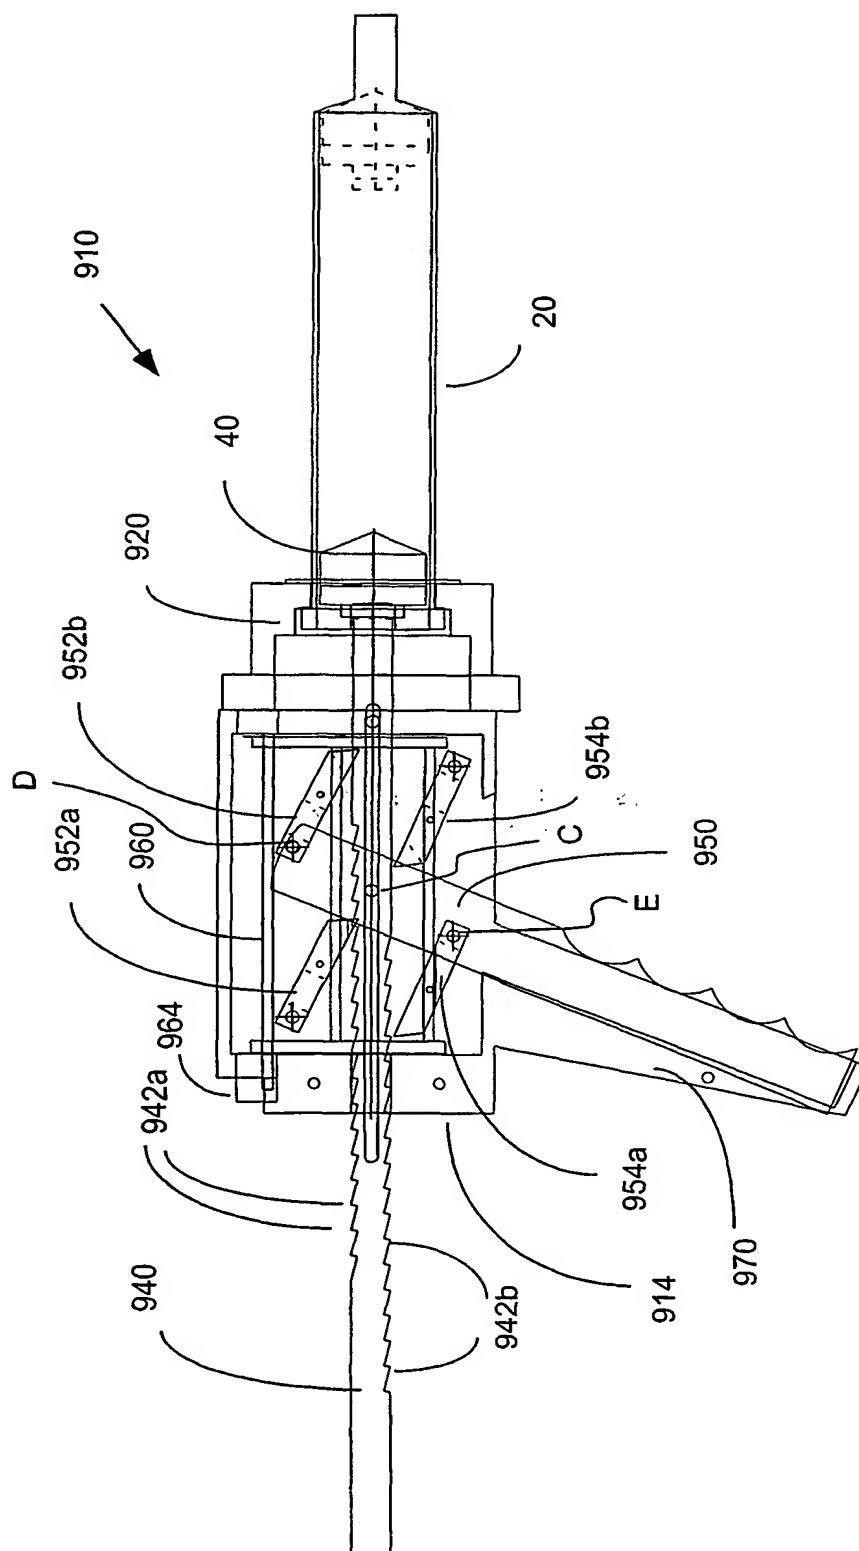


FIG. 5I

**THIS PAGE BLANK (USPTO)**


20/23




**Fig. 6A**

**THIS PAGE BLANK (USPTO)**

21/23

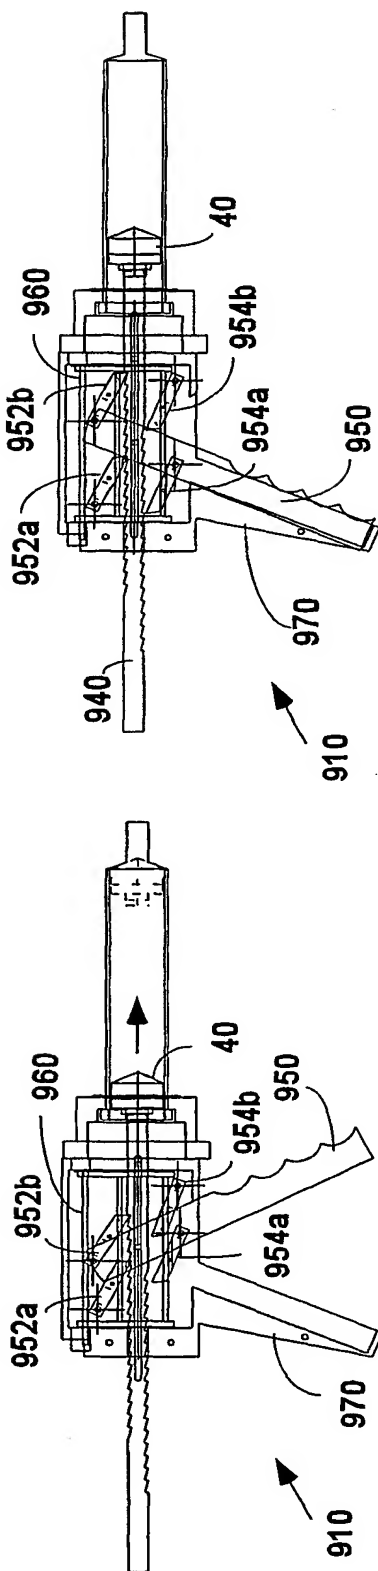

Advancement of Plunger/  
Expelling fluid

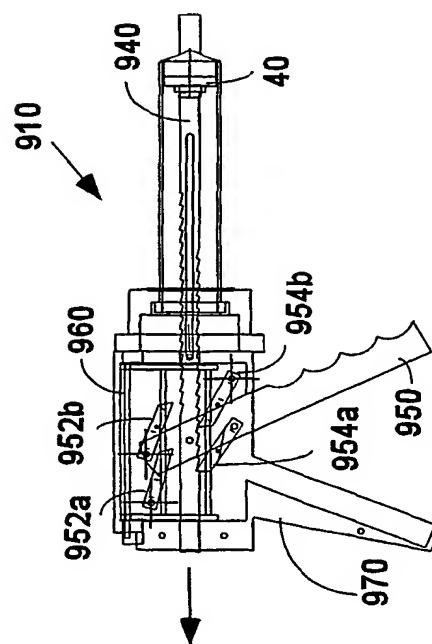

Retraction of Plunger/  
Loading Fluid

Fig. 6B

**THIS PAGE BLANK (USPTO)**

22/23

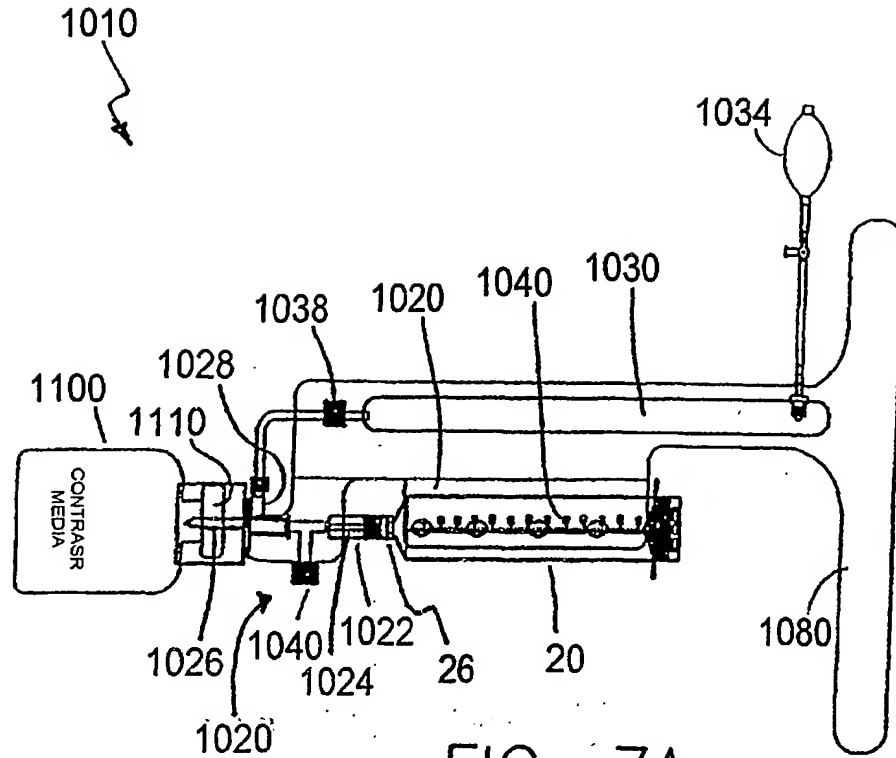


FIG. 7A

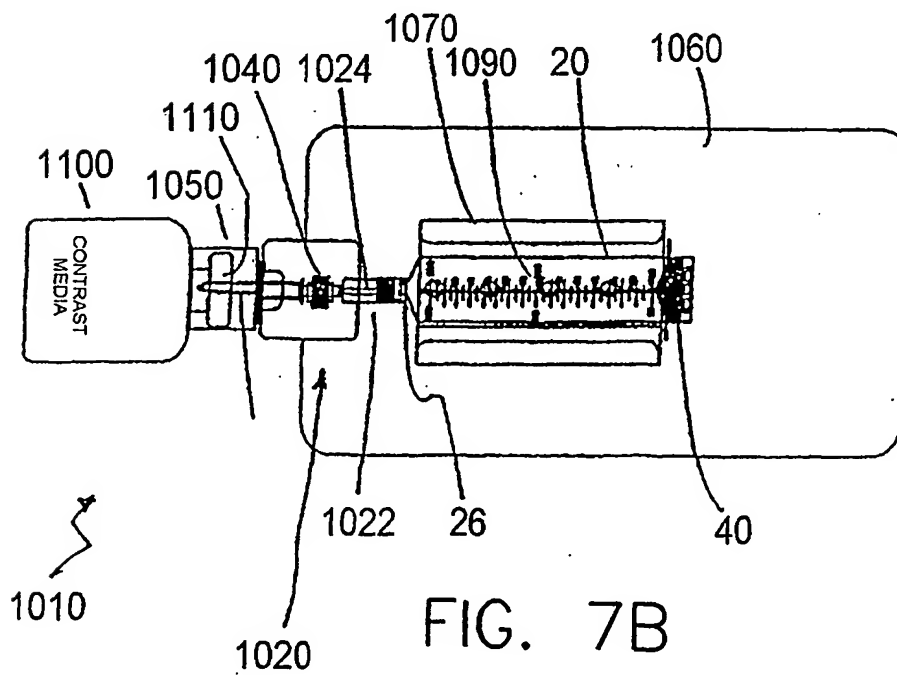


FIG. 7B

**THIS PAGE BLANK (USPTO)**



23/23

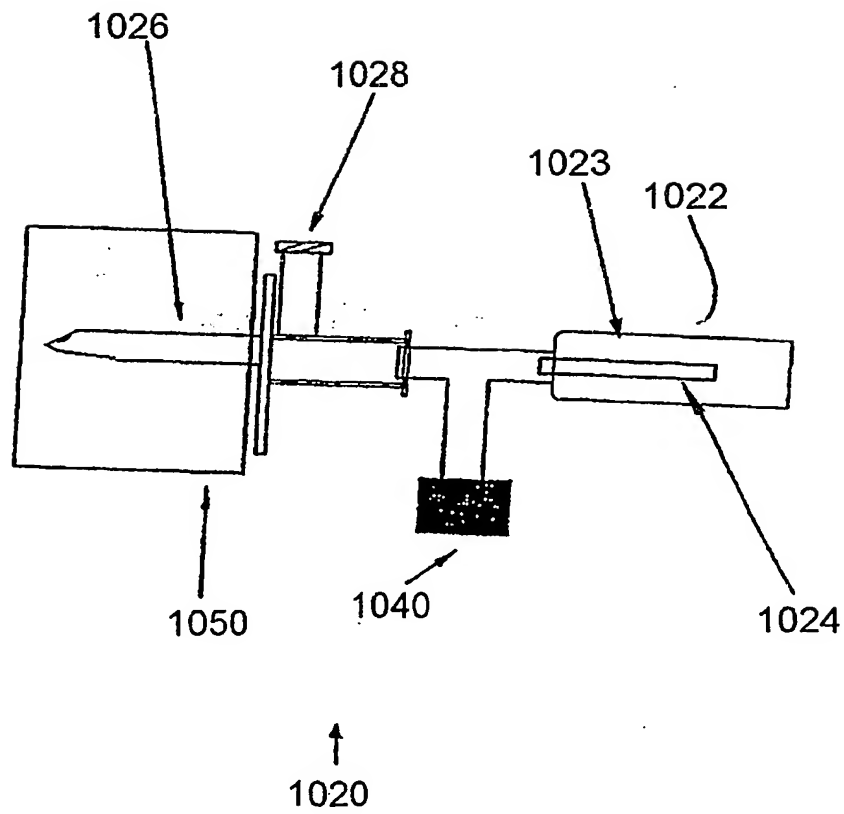


FIG. 7C

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/03210

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 A61M5/145 A61M5/315

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 517 668 A (BRICKSON WILLIAM L) 30 June 1970 (1970-06-30) column 3, line 24 -column 4, line 54; figure 1	1-23
Y	EP 0 584 531 A (MEDRAD INC) 2 March 1994 (1994-03-02) cited in the application figure 1	1-23
A	US 4 472 141 A (DRAGAN WILLIAM B) 18 September 1984 (1984-09-18) figure 19	4,5
A	US 5 520 653 A (HAVRILLA JOSEPH B ET AL) 28 May 1996 (1996-05-28) cited in the application figure 1A	1,14,17, 20
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* & \* document member of the same patent family

Date of the actual completion of the international search

23 July 2002

Date of mailing of the international search report

05/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Ehrsam, F

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/03210

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 677 980 A (UBER III ARTHUR E ET AL) 7 July 1987 (1987-07-07) cited in the application figure 1 -----	1,14,17, 20
A	US 2 463 113 A (KLEIN VICTOR G) 1 March 1949 (1949-03-01) column 3, line 50 - line 66; figure 1 -----	1
A	US 6 068 164 A (TOTARO LUIGI) 30 May 2000 (2000-05-30) column 7, line 45 - line 60; figure 2 -----	1

## INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 02/03210

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3517668	A	30-06-1970	GB 1198214 A	08-07-1970
EP 0584531	A	02-03-1994	US 5383858 A	24-01-1995
			AT 181676 T	15-07-1999
			CA 2097848 A1	18-02-1994
			DE 69325482 D1	05-08-1999
			DE 69325482 T2	28-10-1999
			DK 584531 T3	22-11-1999
			EP 0584531 A2	02-03-1994
			EP 0900573 A2	10-03-1999
			ES 2134230 T3	01-10-1999
			JP 2544571 B2	16-10-1996
			JP 6154322 A	03-06-1994
			US 6090064 A	18-07-2000
			US 5795333 A	18-08-1998
			US 6402717 B1	11-06-2002
			US 6402718 B1	11-06-2002
			US 5741232 A	21-04-1998
			US 5997502 A	07-12-1999
US 4472141	A	18-09-1984	CH 658995 A5	31-12-1986
			DE 3235232 A1	11-05-1983
			FR 2515047 A1	29-04-1983
			FR 2536271 A1	25-05-1984
			GB 2107989 A , B	11-05-1983
			GB 2142245 A , B	16-01-1985
			IT 1189374 B	04-02-1988
			JP 58081033 A	16-05-1983
			US 4569662 A	11-02-1986
US 5520653	A	28-05-1996	EP 0847287 A1	17-06-1998
			EP 0987040 A1	22-03-2000
			JP 11512016 T	19-10-1999
			WO 9709077 A1	13-03-1997
US 4677980	A	07-07-1987	US RE35979 E	01-12-1998
			AT 51525 T	15-04-1990
			AT 93149 T	15-09-1993
			DE 3576915 D1	10-05-1990
			DE 3587540 D1	23-09-1993
			DE 3587540 T2	09-12-1993
			EP 0170009 A1	05-02-1986
			EP 0346950 A2	20-12-1989
US 2463113	A	01-03-1949	NONE	
US 6068164	A	30-05-2000	IT RM960142 A1	01-09-1997
			AT 208021 T	15-11-2001
			AU 2230197 A	16-09-1997
			DE 69707839 D1	06-12-2001
			DK 883773 T3	28-01-2002
			EP 0883773 A1	16-12-1998
			ES 2166975 T3	01-05-2002
			WO 9732156 A1	04-09-1997
			PT 883773 T	29-04-2002
			SI 883773 T1	30-06-2002

**THIS PAGE BLANK (USPTO)**